

---

# WICANDERS WISE



## Natural Performance

---

AMORIM CORK FLOORING



Wicanders Wise has a legacy that goes back to 1868. It is part of Amorim Cork Flooring, the global leading brand in cork-based flooring solutions, present in more than 80 countries worldwide.

With respect for nature as one of its core values, Wicanders Wise has developed durable and sustainable flooring and wall covering solutions with the exclusive comfort provided by cork. Its portfolio is 100% PVC free and has a remarkable negative carbon balance\*, helping to reduce global warming potential.

By combining state of the art technology with this unique raw material, we achieve the highest standard in flooring.

Available with Cork, Wood and Stone visuals, Wicanders Wise cork floors endure impacts and are very comfortable to walk and stand on, while providing a silent and thermally insulated environment.

## *A new level of realism in flooring*



Wicanders Wise celebrates an important milestone, and we proudly introduce a 100% PVC free product portfolio, showcasing our unwavering commitment to sustainability and eco-conscious design.

With our new digital printing collection, Wicanders Wise offers a wide range of natural products, with an exceptional level of realism, brought to life through cutting-edge technology.

Feel the intricate texture of wood and the softness of stone – every knot and grain are carefully designed and replicated in an exquisite selection of visuals that will defy the senses.

Discover our latest collections, 100% PVC free, 100% realistic and 100% powered by the unmatched comfort of cork.

### **Natural Performance**

- Unprecedented level of realism with natural texture
- Unlimited design possibilities
- Premium cork comfort
- Negative carbon balance\*
- Made of renewable resources
- Highly resistant and exceptionally durable
- Suitable for all residential and commercial areas

\*For more information, see page 197

# WICANDERS WISE

## SILENCE

**SILENCE**  
Reduces the walking sound up to 53%.




## IMPACT RESISTANCE

Highest shock absorbing performance.  
SHOCK ABSORBING



## NATURAL THERMAL INSULATION

INFRARED FOOT TEMPERATURE

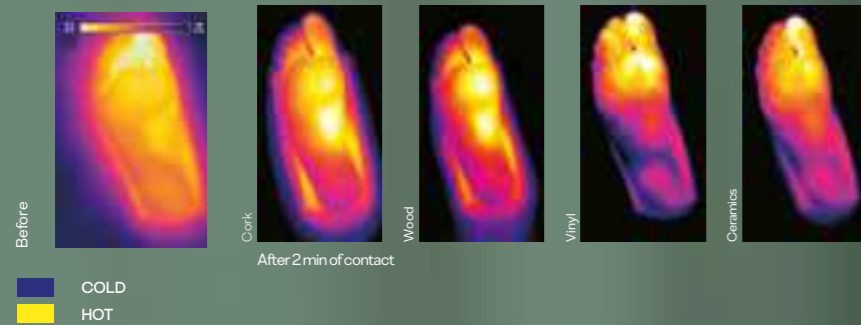

**NATURAL THERMAL INSULATION**  
Optimal temperature all year round.

## INDOOR AIR QUALITY



**INDOOR AIR QUALITY**  
Compliance with the strictest indoor air quality standards after being tested on over 2000 potential chemicals.



## WALKING COMFORT

**WALKING COMFORT**  
Wicanders Wise floors are the perfect mix to reduce heel strike impacts and related body tensions, but stable enough to help the foot impulse and provide the needed stability to reduce effort on walking and decrease body fatigue.



- 1 Reduces body fatigue
- 2 Less lumbar pain, more energetic walking pattern
- 3 Lower heel strike perception, higher comfort
- 4 Decreases average plantar pressures



# cork

- 08 | Cork Bionatural XL
- 14 | Cork Inspire
- 20 | Cork Essence
- 28 | Cork Go
- 34 | Cork Pure
- 44 | Origem



# wood

- 52 | Wood Bionatural XL
- 58 | Wood Inspire Natural
- 72 | Wood Inspire
- 80 | Wood Hydro Natural | Hydro Natural XL
- 98 | Wood Natural | Natural XL
- 112 | Wood Resist Eco
- 120 | Wood Start Green Design
- 124 | Wood Start Resist Eco
- 128 | Wood Pro

# stone

- 134 | Stone Bionatural
- 138 | Stone Hydro Natural
- 146 | Stone Inspire
- 152 | Stone Pure
- 158 | Stone Essence
- 164 | Stone Natural
- 170 | Terrazzo



# dekwall

- 176 | Dekwall
- 184 | Burel Cork Wall

## cork Bioatural XL

Cork Bioatural floor has an innovative bio core made of cork, natural materials and sugar cane waste with more than 95% of renewable content. It has outstanding sustainability credentials achieved through its negative carbon balance\*. The biophilic designs are achieved through natural and unique cork veneers on top of a multilayered PVC free structure.

- 1 HIGH QUALITY PROTECTIVE VARNISH
- 2 NATURAL CORK VENEER
- 3 CORK INLAY
- 4 CORK BIO CORE
- 5 INTEGRATED CORK UNDERLAY



### PRODUCT INFORMATION

Dimension 1525 x 195 mm

Thickness 8,5 mm

Bevel 4 sides micro bevel

Finishing



Locking system



Class of use & Warranty



# cork Bioatural XL



**80003911** - *Traces Tea*



**80003912** - *Traces Natural*



**80003913** - *Traces Champagne*



**80003914** - *Identity Moonlight*



**80003915** - *Identity Timide*



Traces Tea



**80003916** - *Identity Natural*



**80003917** - *Identity Tea*



**80003918** - *Fashionable Antique White*



**80003919** - *Fashionable Cement*



**80003920** - *Fashionable Grafite*



Identity Natural



## cork Inspire

Cork Inspire is a sustainable floor available in a selection of biophilic designs made of natural cork veneers. Ideal for those who are looking for a floating floor with superior comfort and excellent thermal and acoustic performance.

- 1 HRT NON PVC PROTECTIVE SURFACE
- 2 NATURAL CORK VENEER
- 3 CORK INLAY
- 4 NON PVC CORK RIGID CORE
- 5 INTEGRATED CORK UNDERLAY



### PRODUCT INFORMATION

**Dimension** 1225 x 195 mm

**Thickness** 7,0 mm

**Bevel** 4 Sides Beveled

**Finishing** 

**Locking system**  2G

**Class of use & Warranty**     10 YEARS

# cork Inspire





**80003473** - *Identity Nightshade*



**80003474** - *Identity Moonlight*



**80003475** - *Identity Chestnut*



**80003477** - *Traces Tea*



**80003478** - *Traces Spice*



**80003479** - *Traces Jasmim*



**80003480** - *Traces Marfim*



**80003481** - *Traces Natural*



**80003483** - *Shell Jasmim*



**80003484** - *Shell Marfim*



**80003485** - *Originals Shell*



**80003486** - *Originals Harmony*




**80003487** - *Originals Rhapsody*



**80003489** - *Lane Antique White*



**80003490** - *Fashionable Antique White*

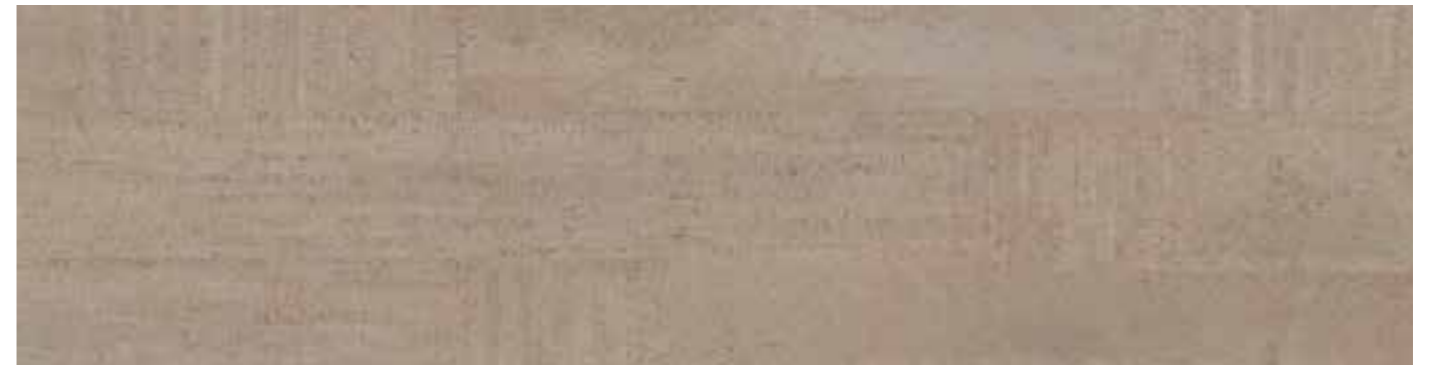

**80003491** - *Fashionable Cement*



**80003492** - *Fashionable Graffiti*




*Originals Rhapsody*



## cork Essence

Rich in style, charm and sophistication, cork Essence expresses its personality through the unique designs and formats aligned with modern interior design trends. In harmony with nature, each board is unique. The ideal floor for creating ambiances full of charm, combined with the unique comfort of cork and the performance requirements of residential and high traffic commercial applications.

- 1 PROTECTIVE SURFACE
- 2 GENUINE CORK VENEER
- 3 AGGLOMERATED CORK
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY

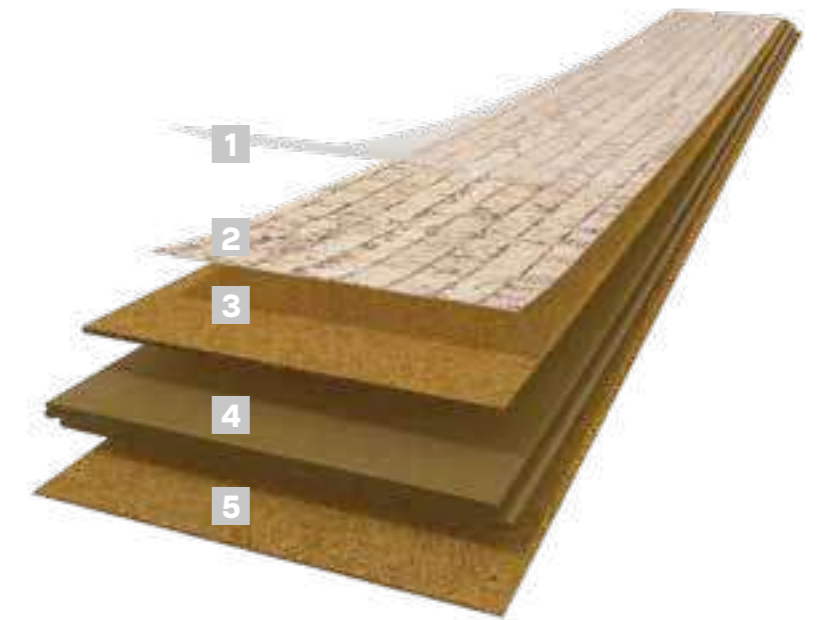


# cork Essence

## PRODUCT INFORMATION



**Dimension** 905 x 295 mm

**Thickness** 10,5 mm

**Bevel** No Bevel

**Finishing** 

**Locking system**  2G

**Class of use & Warranty**    



**80001244** - *Fashionable Glacier*



**80001246** - *Fashionable Cement*



**80001288** - *Fashionable Antique White*



**80001300** - *Novel Edge Natural*



**80001650** - *Identity Moonlight*



**80001651** - *Identity Timide*



**80001652** - *Identity Silver*



Identity Silver



**80001653** - *Identity Champagne*



**80001657** - *Identity Tea*



**80002234** - *Originals Natural*



**80002236** - *Originals Harmony*




**80002238** - *Originals Character*



**80002239** - *Originals Shell*



**80002241** - *Originals Symphony*

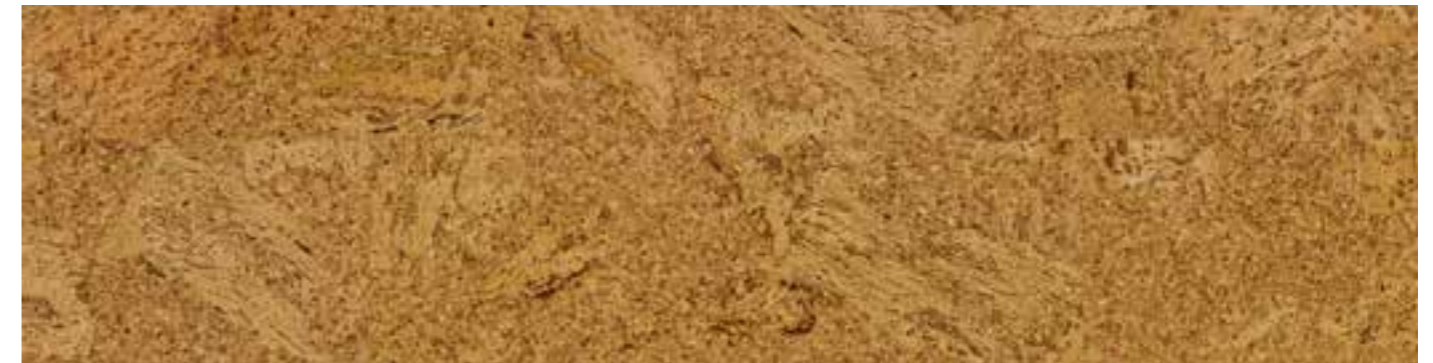

**80002243** - *Originals Accent*



**80002244** - *Originals Dawn*



**80002260** - *Personality Moonlight*



**80002262** - *Personality Timide*



Personality Timide



**80002263** - *Personality Champagne*



**80002266** - *Personality Tea*



Personality Tea



**80002268** - *Personality Chestnut*




cork Go

## cork Go

A budget friendly floating floor designed to bring comfort to residential spaces. The double cork layer in its structure reinforces the thermal and acoustic performance for a cozy atmosphere. Easy to clean and maintain, cork Go offers a 10 year warranty for domestic use.

- 1 PROTECTIVE SURFACE
- 2 GENUINE CORK VENEER
- 3 AGGLOMERATED CORK
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY

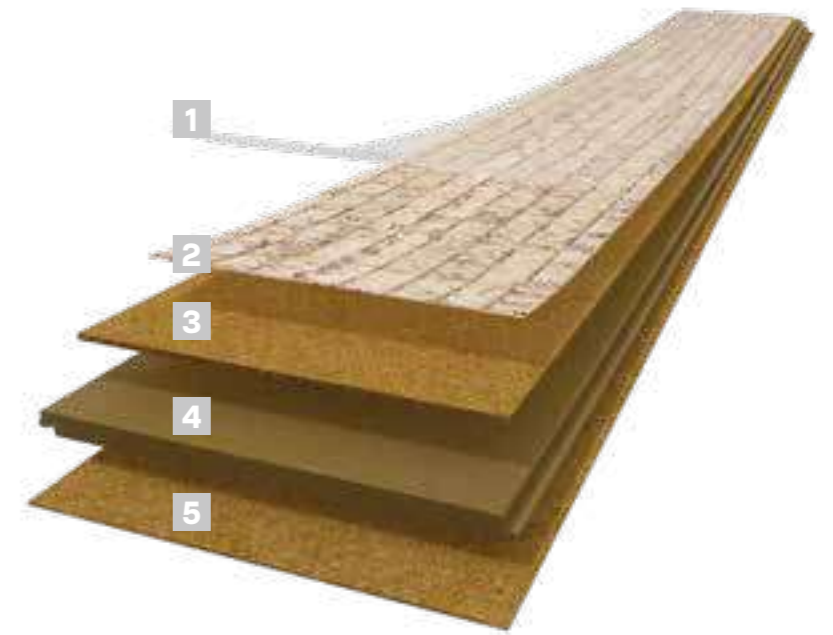

### PRODUCT INFORMATION

Dimension 905 x 295 mm

Thickness 10,5 mm

Bevel No Bevel

Finishing 

Locking system  2G

Class of use & Warranty   



**80001218** - *Whim*



**80001285** - *Gloomy*



**80001631** - *Moment*



**80001633** - *Desire*



**80001636** - *Charm*



Desire



**80001638** - *Allure*



**80001640** - *Attraction*



**80001642** - *Dream*





Dream



**80001643** - *Ambition*



**80002131** - *Earth Tones Grit*



**80002133** - *Earth Tones Sand*



Charm



# cork Pure floor & wall




## cork Pure floor & wall

Cork Pure Floor & Wall offers a wide variety of natural cork veneers that can be applied on the floor or on the wall for a customized space.

- 1 PROTECTIVE SURFACE
- 2 GENUINE CORK VENEER
- 3 AGGLOMERATED CORK



### PRODUCT INFORMATION

Dimension	600 x 300 mm
Thickness	4,0 mm
Bevel	4 Sides Beveled
Finishing	 
Locking system	
Class of use & Warranty	Unfinished surface. It must be finished on site. Please contact your local retailer.



**80000218** - *Originals Natural*



**80000230** - *Identity Moonlight*




**80000244** - *Personality Natural*



**80000266** - *Personality Moonlight*




**80000281** - *Personality Tea*

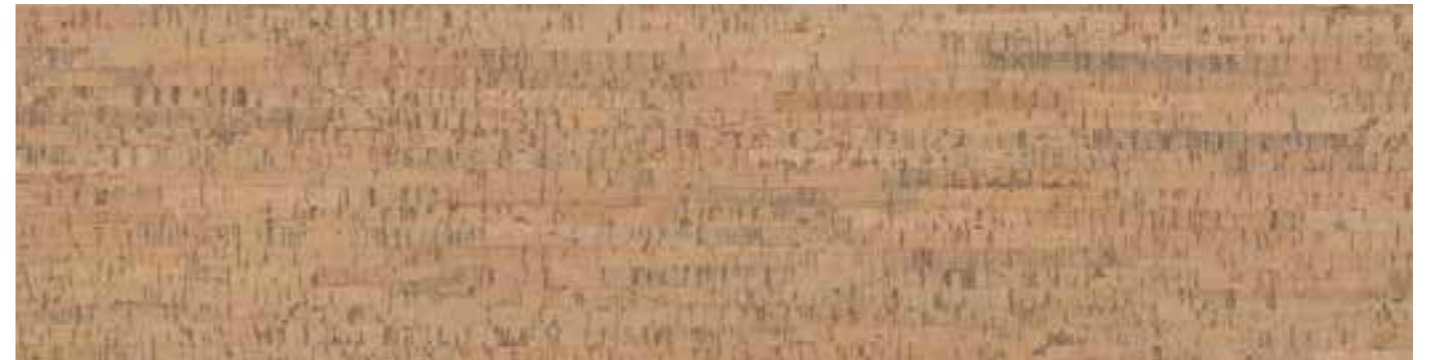

**80000291** - *Traces Natural*



**80000295** - *Identity Natural*

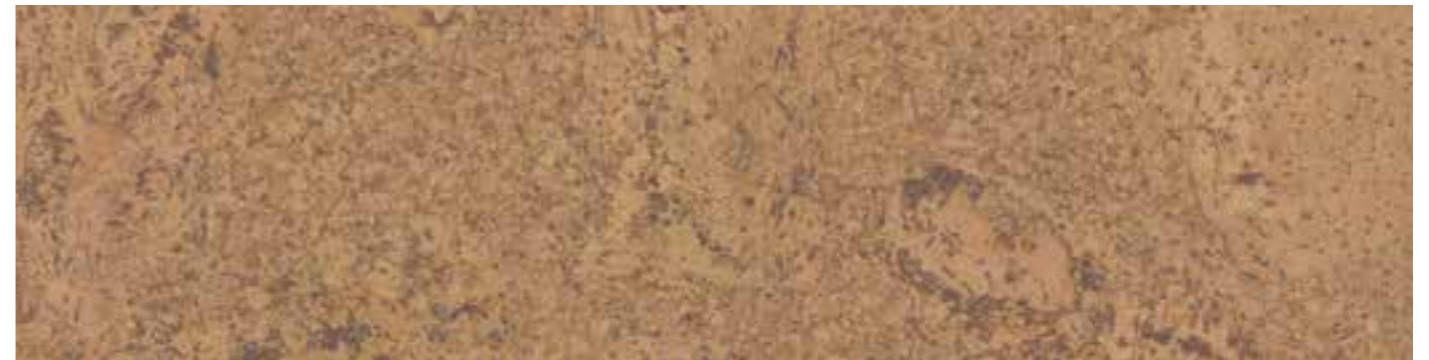

**80000331** - *Accent Natural*



**80001313** - *Originals Harmony*



**80001390** - *Addict*



**80000222** - *Originals Moonlight*



**80000223** - *Originals Tea*



**80000224** - *Originals Chestnut*



**80000225** - *Originals Cement*



**80000226** - *Originals Antracite*



**80000227** - *Originals Grafite*



**80000232** - *Identity Champagne*



**80000235** - *Originals Camel*



**80000236** - *Identity Tea*



**80000239** - *Originals Antique White*



**80000240** - *Identity Cement*



**80000241** - *Identity Grafite*



**80000242** - *Identity Antique White*



**80000253** - *Personality Antracite*



**80000254** - *Personality Grafite*



**80000313** - *Identity Camel*



**80000255** - *Identity Chestnut*



**80000259** - *Personality Champagne*



**80000273** - *Originals Champagne*



**80000293** - *Shell Natural*



**80000303** - *Fashionable Cement*



**80000342** - *Symphony Natural*



**80000354** - *Symphony Antique White*



**80000355** - *Fashionable Natural*



**80000360** - *Linn Natural*




**80000366** - *Reed Natural*

Origem captures the essence of the colours from the Montado, the fragile and important ecosystem where cork has its origins. The greens and oranges are the background tones of this landscape, that slowly changes its hues each harvesting season. The collection transports different colour elements of this landscape to our everyday life, adding a touch of nature to our homes and offices. Comprising 8 new colours for flooring and 2 new colours for wall coverings, Origem takes its orange and green tones from nature, adding bright yellow and grey as contrasting elements.

1 PROTECTIVE SURFACE

2 GENUINE CORK VENEER


3 AGGLOMERATED CORK

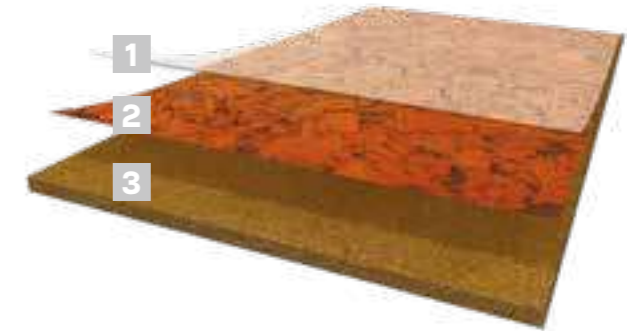





1 PROTECTIVE FINISH

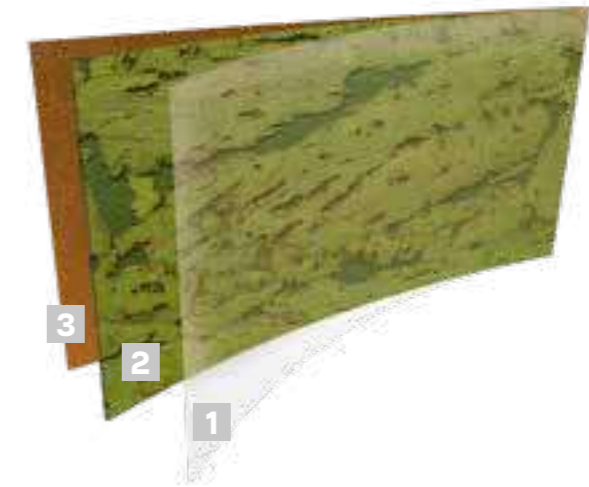2 GENUINE CORK VENEER




3 CORK AGGLOMERATED CORE



### PRODUCT INFORMATION FLOOR

Dimension	900 x 600 mm
Thickness	8 mm
Bevel	No Bevel
Finishing	 
Locking system	
Class of use & Warranty (PU PRE-FINISHING)	 23  
Class of use & Warranty (HRT FINISHING)	 23    


### PRODUCT INFORMATION WALL

Dimension	600 x 300 mm
Thickness	3 mm
Bevel	No Bevel
Finishing	 
Locking system	

# wall




81000281 - *Fiord Apricot*

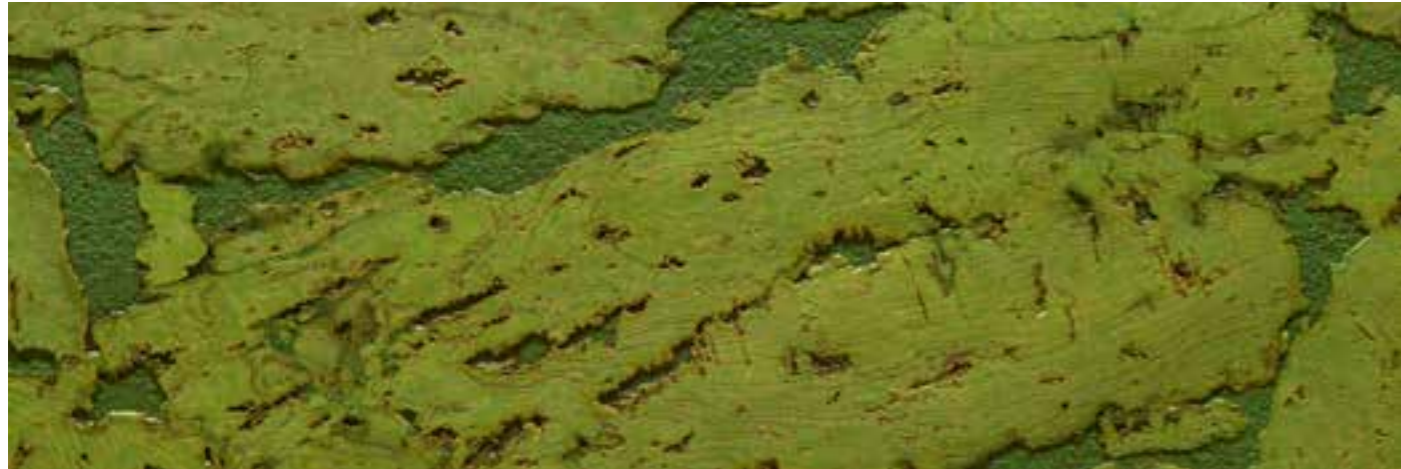

81000282 - *Fiord Leaf*



81000283 - *Hawai Apricot*

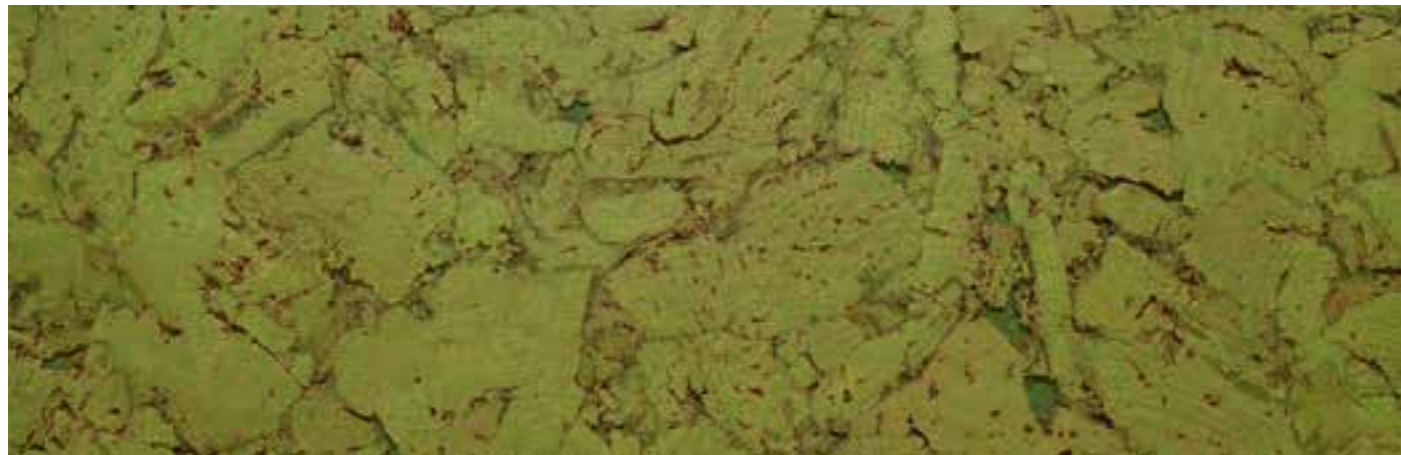


81000284 - *Hawai Leaf*




Fiord Apricot



# floor

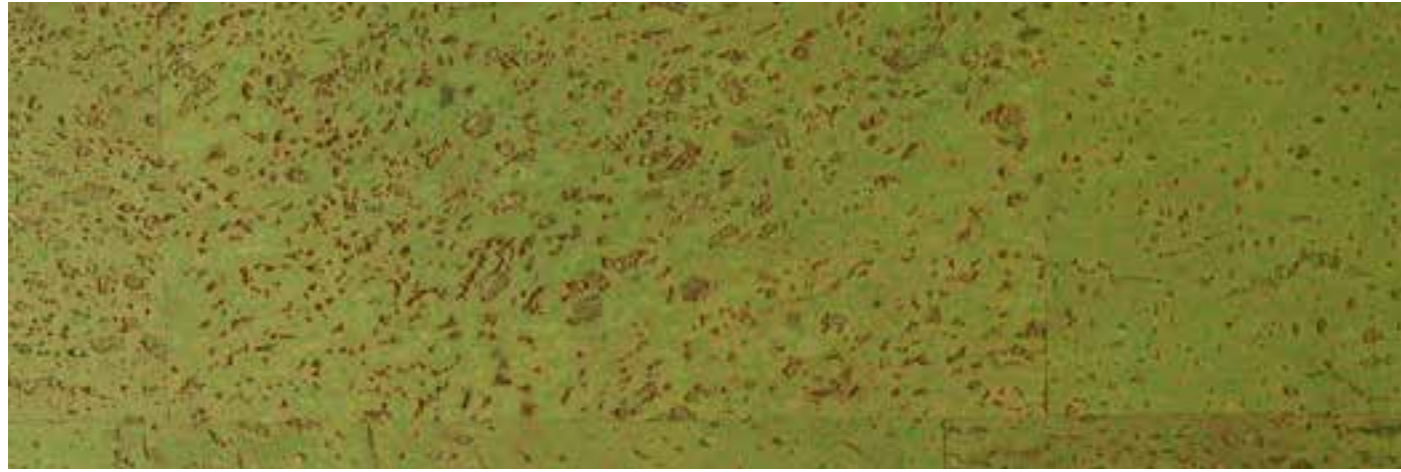

80002685 - Identity Leaf

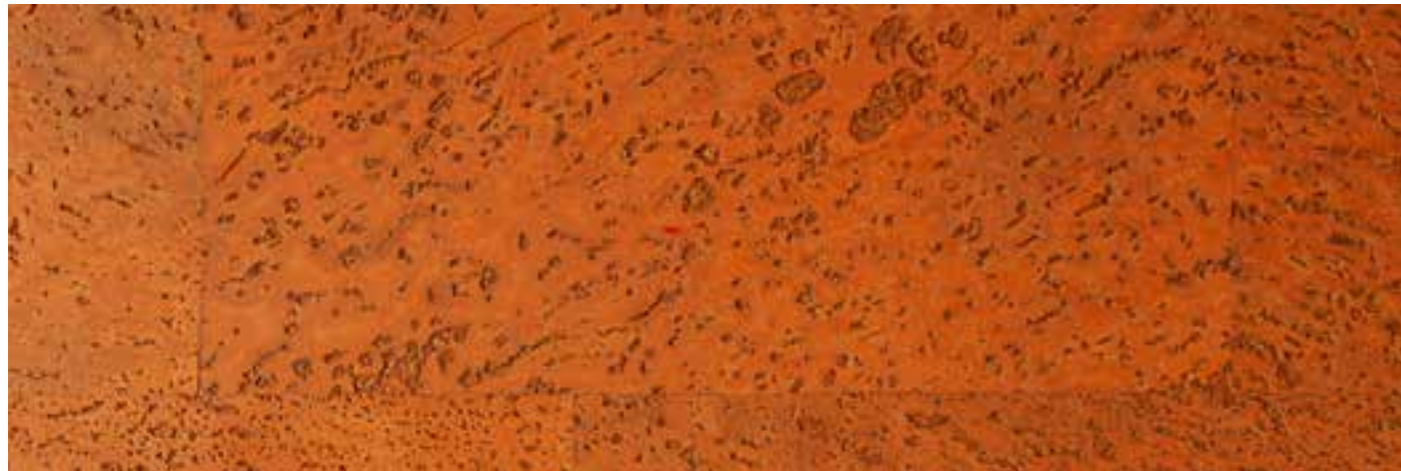

80002686 - Identity Apricot




80002687 - Identity Terracotta



80002688 - Identity Coral

# floor

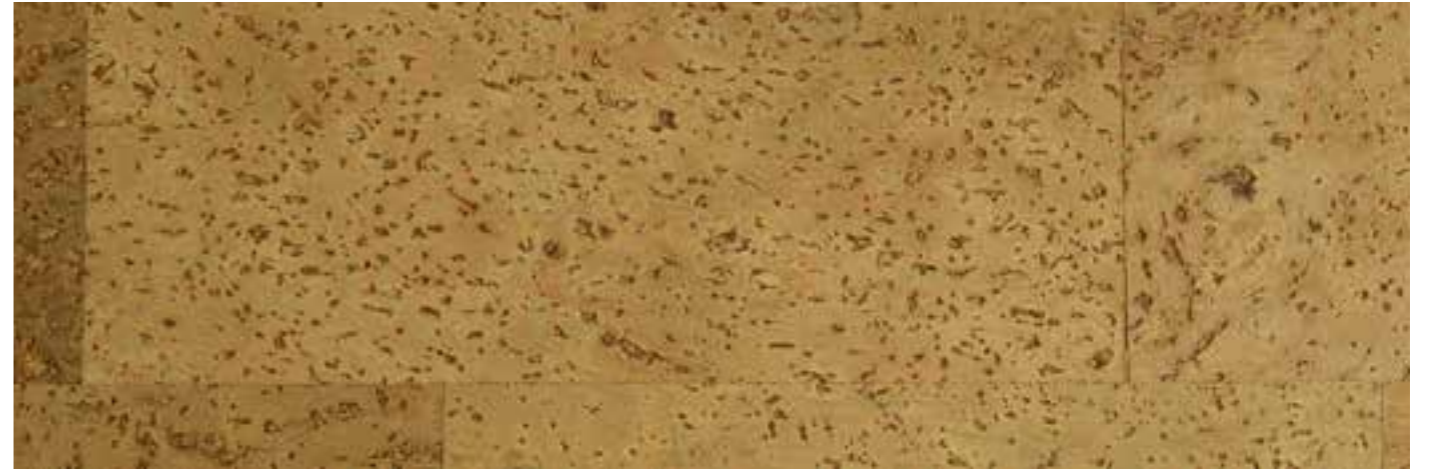

80002689 - Identity Olive



80002690 - Identity Moss




80002691 - Identity Sunflower



80002692 - Identity Bark

# floor

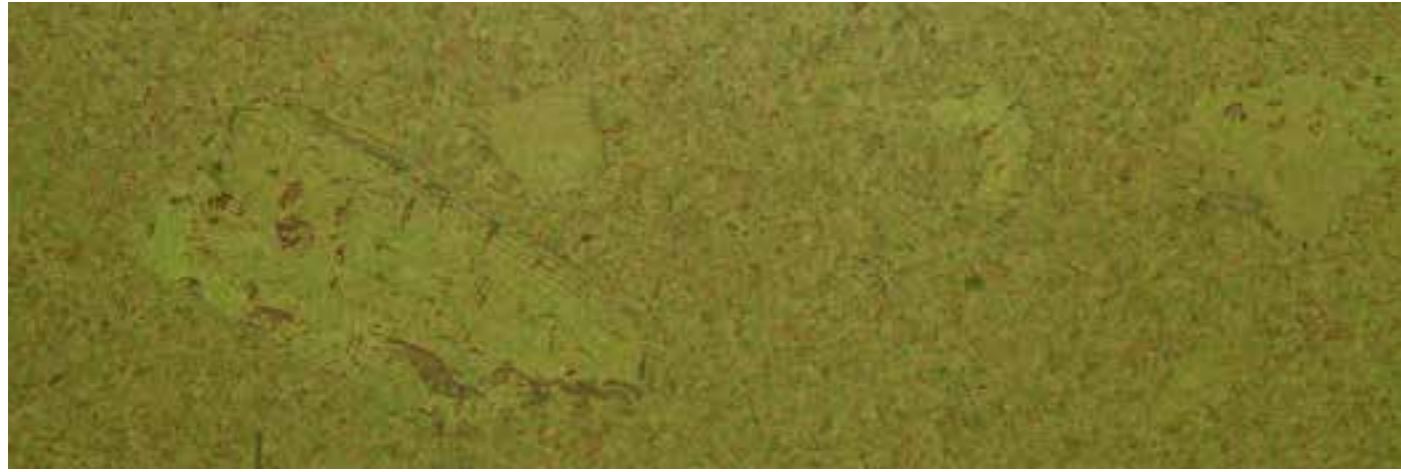

**80002693** - *Shell Leaf*



**80002694** - *Shell Apricot*



**80002695** - *Shell Terracota*



**80002696** - *Shell Coral*

# floor



**80002697** - *Shell Olive*



**80002698** - *Shell Moss*



**80002699** - *Shell Sunflower*



**80002700** - *Shell Bark*



# wood Bionatural XL

Essential Oak Tan

## wood Bionatural XL

Bionatural has a 100% natural and fossil plastic free core. Its innovative bio core is made of cork, sugar cane waste and natural materials, with a renewable content above 95%. Bionatural is available in cork, wood and stone visuals. The cork visuals are made using natural cork veneers and the wood and stone visuals are achieved through cutting-edge digital printing 3D embossing technology. Bionatural range will defy your senses due to its level of realism and intricate texture.

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK INLAY
- 4 CORK BIO CORE
- 5 INTEGRATED CORK UNDERLAY



### PRODUCT INFORMATION

Dimension 1525 x 195 mm

Thickness 9,5 mm

Bevel 4 sides micro bevel

Finishing 

Locking system  2G

Class of use & Warranty





**80004051** - *Essential Oak Desert*



**80004050** - *Essential Oak Tan*



**80004016** - *Farnia Oak Savannah*



**80004017** - *Farnia Oak*



*Farnia Oak Savannah*



**80004025** - *Smoke Oak Mid Grey*



**80004026** - *Smoke Oak Honey*



Smoke Oak Honey



Ginger Wood Brown



**80004045** - *Ginger Wood Fume*



**80004047** - *Ginger Wood Brown*

## wood Inspire Natural

Wood Inspire Natural is a PVC free floating floor available in a wide range of wood visuals. By combining an advanced surface technology with embossed in register a new level of realism is achieved. wood Inspire Natural is not only sustainable and aesthetically pleasing but also comfortable (even when barefoot).

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK INLAY
- 4 PVC FREE CORK RIGID CORE
- 5 INTEGRATED CORK UNDERLAY



# wood Inspire Natural

Smoke Oak Ash

## PRODUCT INFORMATION

Dimension 1225 x 195 mm

Thickness 8,5 mm

Bevel 4 Sides micro bevel

Finishing 

Locking system  2G

Class of use & Warranty





**80003921** - *Epoca Oak*



**80003922** - *Epoca Oak Sand*



**80003923** - *Epoca Oak Honey*



**80003924** - *Epoca Oak Dark Almond*



*Epoca Oak Dark Almond*



**80003925** - *Pure Oak*



**80003926** - *Pure Oak Grey*



**80003928** - *Farnia Oak Savannah*



**80003930** - *Ariana Oak*



**80003935** - *Smoke Oak Mid Grey*



**80003939** - *Smoke Oak Ash*



**80003942** - *Panama Oak*



**80003943** - *Panama Oak Light Sand*





**80003945** - Panama Oak Cognac



**80003946** - Panama Oak Hay



Panama Oak



**80003947** - Dakota Oak



**80003948** - Dakota Oak Sand



**80003953** - Natural Oak Beige



**80003956** - Ginger Wood Camel



**80003960** - *Essential Oak*



**80003961** - *Essential Oak White*



**80003965** - *Essential Oak Elegant*



**80003966** - *Essential Oak Camel*



Essential Oak White



**80003949** - *Dakota Oak Greyge*



**80003950** - *Dakota Oak Brown*



**80003951** - *Natural Oak*



**80003952** - *Natural Oak Almond*



Essential Oak Camel



**80003968** - *Antique Oak Honey*



**80003969** - *Antique Oak Hazelnut*



**80003970** - *Antique Oak Tobacco*



**80003972** - *Alaska Oak*



**80003976** - *Elegant Oak*



**80003977** - *Sawn Bisque Oak*



Sawn Bisque Oak



**80003978** - *Argent Oak*



**80003979** - *Linen Oak*



# woodInspire

## woodInspire

Wood Inspire is a PVC free floor designed for intensive use in residential and commercial areas. The high end wood designs are achieved without cutting down trees.

- 1 NON PVC PROTECTIVE WEAR LAYER
- 2 NON PVC WOOD PRINTED FILM
- 3 CORK INLAY
- 4 NON PVC CORK RIGID CORE
- 5 INTEGRATED CORK UNDERLAY



### PRODUCT INFORMATION

**Dimension** 1225 x 195 mm

**Thickness** 7,3 mm

**Bevel** 4 Sides micro bevel

**Finishing** 

**Locking system**  2G

**Class of use & Warranty**





**80003512** - *Contempo Loft*



**80003513** - *Contempo Copper*



**80003514** - *Contempo Rust*



**80003515** - *Contempo Ivory*



Contempo Ivory



**80003517** - *Natural Light Oak*



**80003518** - *Treehouse*



**80003520** - *Beach House*



**80003521** - *White Forest Oak*



**80003525** - *Barnwood*



**80003526** - *Mountain Oak*



**80003527** - *Sprucewood*



**80003528** - *Highland Oak*



**80003529** - *Royal Oak*



**80003530** - *Manor Oak*



**80003531** - *Ocean Oak*



**80003532** - *Field Oak*



**80003533** - *Diamond Oak*



**80003536** - *Mocca Oak*



**80003537** - *Quartz Oak*



**80003538** - *Gold Coast Oak*



Natural Light Oak





# wood Hydro Natural

Smoke Oak Grey

wood Hydro Natural

**XL Size**  
Available



Wood Hydro Natural is an innovative waterproof floor with a PVC free structure, ensuring both durability and sustainability credentials. Besides its outstanding performance, it features an authentic texture achieved through advanced printing technology. Wood Hydro Natural XL is a waterproof and PVC-free floor that not only offers eco-conscious durability but also an authentic wood texture created through advanced printing technology. It comes in a longer plank format, providing a versatile and contemporary solution for residential and commercial spaces.

Format  
1225 x 195 x 5,5mm  
XL - 1525 x 195 x 7mm

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK COMPOSITE CORE



## PRODUCT INFORMATION

Dimension	1225 x 195 mm XL - 1525 x 195 mm
Thickness	5,5 mm XL - 7mm
Bevel	4 Sides micro bevel
Finishing	
Locking system	 2G
Class of use & Warranty	    



**80003742** - *Epoca Oak*  
**80003802 (XL)** - *Epoca Oak*



**80003744** - *Epoca Oak Sand*  
**80003803 (XL)** - *Epoca Oak Sand*



**80003745** - *Epoca Oak Honey*  
**80003804 (XL)** - *Epoca Oak Honey*



**80003746** - *Epoca Oak Dark Almond*  
**80003805 (XL)** - *Epoca Oak Dark Almond*



**80003747** - *Pure Oak*  
**80003806 (XL)** - *Pure Oak*



**80003748** - *Pure Oak Grey*  
**80003807 (XL)** - *Pure Oak Grey*



**80003750** - *Farnia Oak Savannah*  
**80003809 (XL)** - *Farnia Oak Savannah*



**80003752** - *Ariana Oak*  
**80003811 (XL)** - *Ariana Oak*



**80003754** - Ariana Oak Beige  
**80003813 (XL)** - Ariana Oak Beige



**80003755** - Ariana Oak Light Chocolate  
**80003814 (XL)** - Ariana Oak Light Chocolate



**80003812 (XL)** - Ariana Oak White



**80003756** - Smoke Oak  
**80003815 (XL)** - Smoke Oak



**80003757** - Smoke Oak Grey  
**80003816 (XL)** - Smoke Oak Grey



**80003761** - Smoke Oak Ash  
**80003820 (XL)** - Smoke Oak Ash



**80003817 (XL)** - Smoke Oak Ivory



**80003762** - Farnetto Oak  
**80003821 (XL)** - Farnetto Oak



**80003764** - Panama Oak  
**80003823 (XL)** - Panama Oak




**80003765** - Panama Oak Light Sand  
**80003824 (XL)** - Panama Oak Light Sand



**80003767** - Panama Oak Cognac  
**80003826 (XL)** - Panama Oak Cognac



**80003768** - Panama Oak Hay  
**80003827 (XL)** - Panama Oak Hay

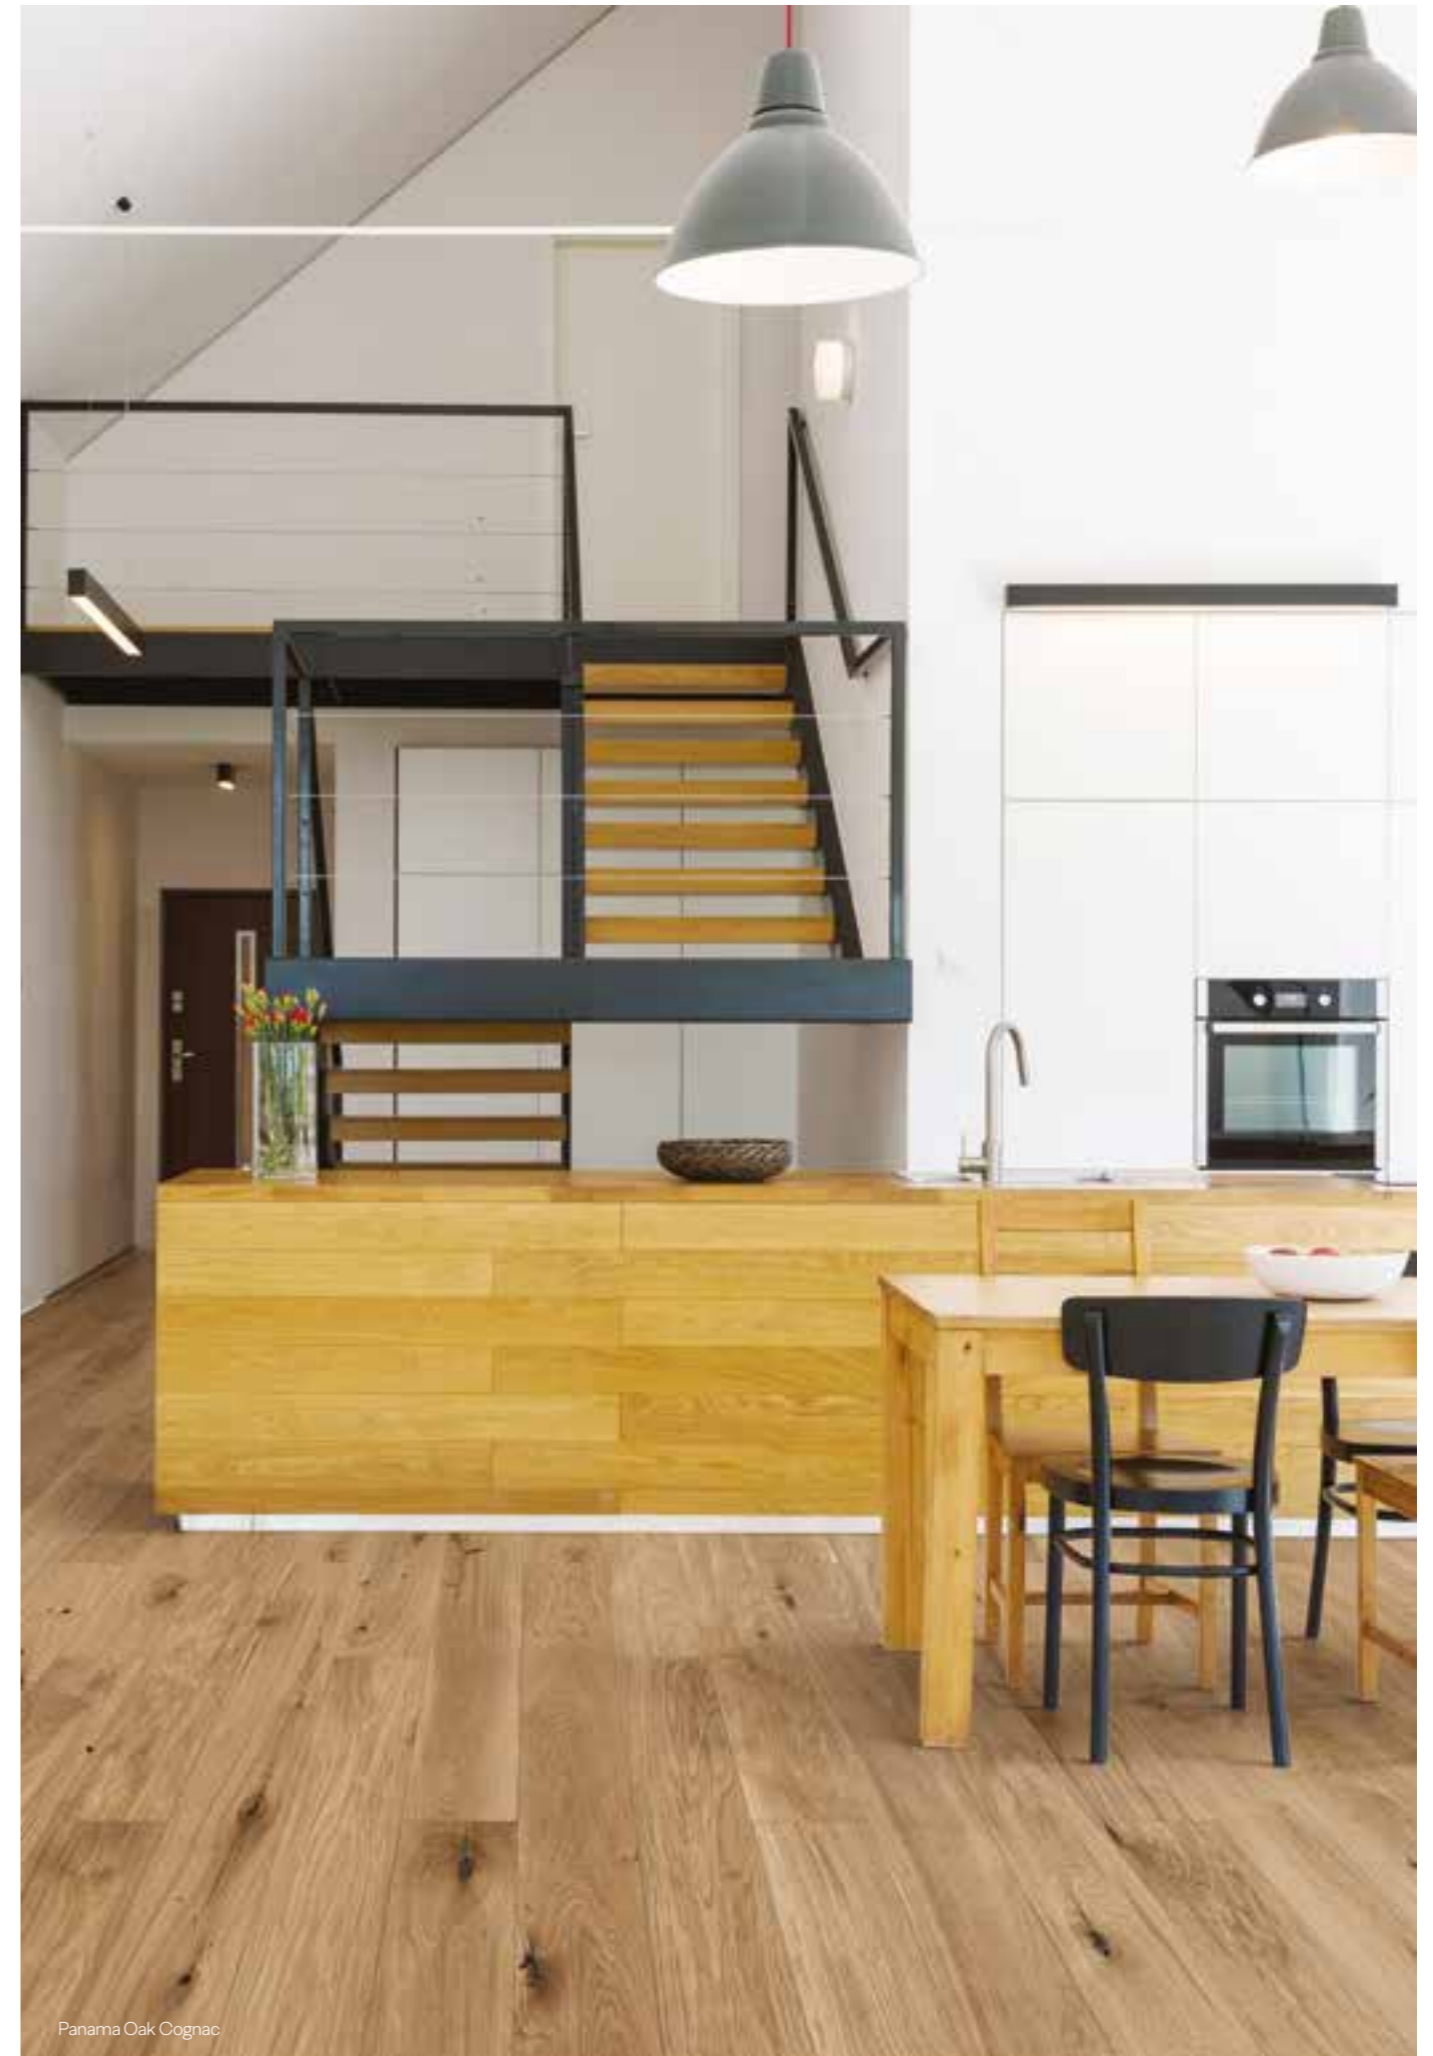

Panama Oak Cognac



**80003769** - *Dakota Oak*  
**80003828 (XL)** - *Dakota Oak*



**80003770** - *Dakota Oak Sand*  
**80003829 (XL)** - *Dakota Oak Sand*



Dakota Oak Sand



Dakota Oak Brown



**80003771** - *Dakota Oak Greyge*  
**80003830 (XL)** - *Dakota Oak Greyge*



**80003772** - *Dakota Oak Brown*  
**80003831 (XL)** - *Dakota Oak Brown*



**80003773** - *Natural Oak*  
**80003832 (XL)** - *Natural Oak*



**80003774** - *Natural Oak Almond*  
**80003833 (XL)** - *Natural Oak Almond*



**80003775** - *Natural Oak Beige*  
**80003834 (XL)** - *Natural Oak Beige*



**80003834 (XL)** - *Natural Oak White*



Natural Oak Almond



**80003777** - *Ginger Wood*  
**80003836 (XL)** - *Ginger Wood*



**80003778** - *Ginger Wood Camel*  
**80003837 (XL)** - *Ginger Wood Camel*



**80003779** - *Ginger Wood Fume*  
**80003838 (XL)** - *Ginger Wood Fume*



**80003782** - *Essential Oak*  
**80003841 (XL)** - *Essential Oak*



**80003783** - *Essential Oak White*  
**80003842 (XL)** - *Essential Oak White*



**80003785** - *Essential Oak Desert*  
**80003844 (XL)** - *Essential Oak Desert*



Essential Oak White



**80003787** - *Essential Oak Elegant*  
**80003846 (XL)** - *Essential Oak Elegant*



**80003788** - *Essential Oak Camel*  
**80003847 (XL)** - *Essential Oak Camel*



**80003845 (XL)** - *Essential Oak Pecan*



**80003789** - *Antique Oak*  
**80003848 (XL)** - *Antique Oak*



**80003790** - *Antique Oak Honey*  
**80003849 (XL)** - *Antique Oak Honey*



**80003791** - *Antique Oak Hazelnut*  
**80003850 (XL)** - *Antique Oak Hazelnut*



**80003792** - *Antique Oak Tobacco*  
**80003851 (XL)** - *Antique Oak Tobacco*



**80003793** - *Highland Pine*





**80003794** - *Alaska Oak*  
**80003853 (XL)** - *Alaska Oak*



**80003795** - *Arabian Desert Oak*



**80003796** - *Rustic Canyon*



**80003797** - *Oak Light Nature*



**80003798** - *Elegant Oak*  
**80003857 (XL)** - *Elegant Oak*



**80003799** - *Sawn Bisque Oak*  
**80003858 (XL)** - *Sawn Bisque Oak*



**80003800** - *Argent Oak*  
**80003859 (XL)** - *Argent Oak*



**80003801** - *Linen Oak*  
**80003860 (XL)** - *Linen Oak*



wood Natural

**XL Size**  
Available

Wood Natural is a resilient floor built to last. It combines durability with visually appealing digital printed designs. It also provides exceptional thermal and acoustic comfort due to cork, making it a comfortable and sustainable option for those who prefer wood looks without cutting any trees.

Wood Natural XL provides comfort and visual appeal in a longer plank format. Designed for a contemporary look, it has a natural texture that resembles wood achieved through advanced printing technology. It delivers exceptional thermal and acoustic comfort due to cork in its composition, creating a cozy and quiet environment.

wood Natural

Panama Oak

Format  
1220 x 185 x 9mm  
XL - 1830 x 185 x 10mm

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK INLAY
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY



**PRODUCT INFORMATION**

<b>Dimension</b>	1220 x 185 mm XL - 1830 x 185 mm
<b>Thickness</b>	9 mm XL - 10mm
<b>Bevel</b>	4 Sides micro bevel
<b>Finishing</b>	
<b>Locking system</b>	 2G
<b>Class of use &amp; Warranty</b>	 



**80003567** - Epoca Oak  
**80003632 (XL)** - Epoca Oak



**80003568** - Epoca Oak Sand  
**80003635 (XL)** - Epoca Oak Sand



**80003569** - Epoca Oak Honey  
**80003636 (XL)** - Epoca Oak Honey



**80003570** - Epoca Oak Dark Almond  
**80003637 (XL)** - Epoca Oak Dark Almond



**80003571** - Pure Oak  
**80003638 (XL)** - Pure Oak



**80003572** - Pure Oak Grey  
**80003639 (XL)** - Pure Oak Grey



**80003574** - Farnia Oak Savannah  
**80003642 (XL)** - Farnia Oak Savannah



**80003576** - Ariana Oak  
**80003644 (XL)** - Ariana Oak



**80003577** - Ariana Oak White



**80003578** - Ariana Oak Beige



Ariana Oak Beige



**80003647 (XL)** - Ariana Oak Light Chocolate



**80003580** - Smoke Oak  
**80003648 (XL)** - Smoke Oak



**80003581** - Smoke Oak Grey  
**80003649 (XL)** - Smoke Oak Grey



**80003585** - Smoke Oak Ash  
**80003653 (XL)** - Smoke Oak Ash




**80003586** - *Farnetto Oak*  
**80003654 (XL)** - *Farnetto Oak*



**80003588** - *Panama Oak*  
**80003656 (XL)** - *Panama Oak*



**80003589** - *Panama Oak Light Sand*  
**80003657 (XL)** - *Panama Oak Light Sand*

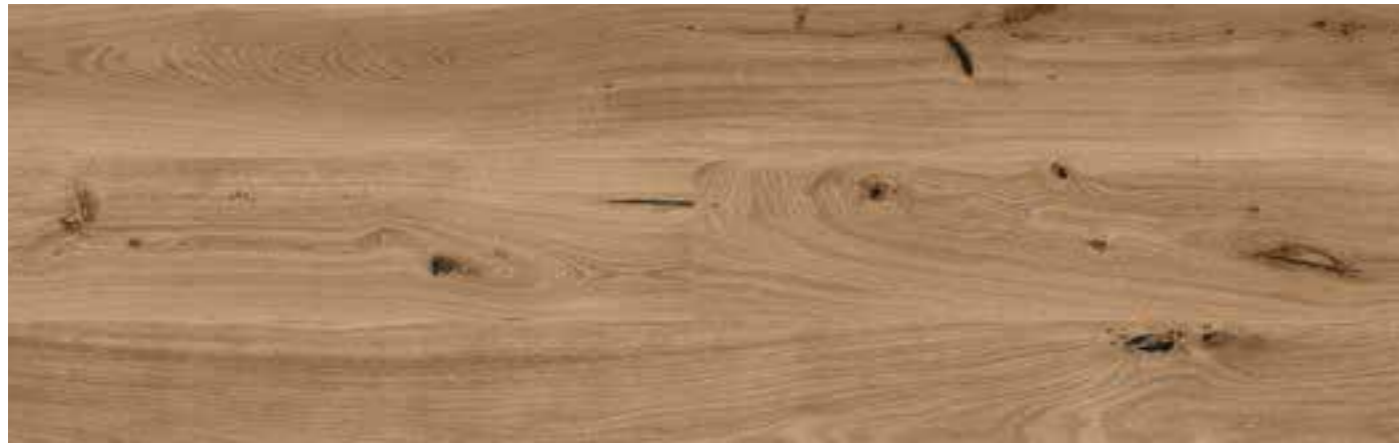

**80003591** - *Panama Oak Cognac*  
**80003659 (XL)** - *Panama Oak Cognac*



*Panama Oak Hay*



**80003592** - *Panama Oak Hay*  
**80003660 (XL)** - *Panama Oak Hay*



**80003593** - *Dakota Oak*  
**80003661 (XL)** - *Dakota Oak*



**80003594** - Dakota Oak Sand  
**80003662 (XL)** - Dakota Oak Sand



**80003595** - Dakota Oak Greyge  
**80003663 (XL)** - Dakota Oak Greyge



**80003596** - Dakota Oak Brown  
**80003664 (XL)** - Dakota Oak Brown



**80003597** - Natural Oak  
**80003665 (XL)** - Natural Oak



**80003598** - Natural Oak Almond  
**80003666 (XL)** - Natural Oak Almond



**80003599** - Natural Oak Beige  
**80003667 (XL)** - Natural Oak Beige



**80003602** - Ginger Wood Camel  
**80003670 (XL)** - Ginger Wood Camel



**80003603** - Ginger Wood Fume  
**80003671 (XL)** - Ginger Wood Fume



**80003612** - *Essential Oak*  
**80003674 (XL)** - *Essential Oak*



**80003613** - *Essential Oak White*  
**80003675 (XL)** - *Essential Oak White*



**80003615** - *Essential Oak Desert*  
**80003679 (XL)** - *Essential Oak Desert*



**80003617** - *Essential Oak Elegant*  
**80003682 (XL)** - *Essential Oak Elegant*



*Essential Oak Elegant*



**80003618** - *Essential Oak Camel*  
**80003683 (XL)** - *Essential Oak Camel*



**80003620** - *Antique Oak Honey*  
**80003685 (XL)** - *Antique Oak Honey*



**80003621** - *Antique Oak Hazelnut*  
**80003686 (XL)** - *Antique Oak Hazelnut*



**80003622** - *Antique Oak Tobacco*  
**80003687 (XL)** - *Antique Oak Tobacco*



Alaska Oak



**80003624** - *Alaska Oak*  
**80003689 (XL)** - *Alaska Oak*



**80003628** - *Elegant Oak*  
**80003693 (XL)** - *Elegant Oak*



**80003629** - *Sawn Bisque Oak*  
**80003694 (XL)** - *Sawn Bisque Oak*



**80003630** - *Argent Oak*  
**80003695 (XL)** - *Argent Oak*



**80003631** - *Linen Oak*  
**80003696 (XL)** - *Linen Oak*





# wood Resist Eco

## wood Resist Eco

PVC Free surface available in an extensive collection of wood visuals. Designed to withstand the needs of our daily lives and commercial areas due to its wear resistance and indoor air quality credentials. The extra thick cork top layer gives the product an outstanding comfort, while reducing the walking sound. The perfect combination between the beauty of wood and the performance, stability, comfort and ease of maintenance.

- 1 PVC-FREE PROTECTIVE WEAR LAYER
- 2 HIGH RESOLUTION DECORATIVE FILM
- 3 AGGLOMERATED CORK
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY



### PRODUCT INFORMATION

Dimension 1220 x 185 mm

Thickness 10,5 mm

Bevel 4 Sides micro bevel

Finishing 

Locking system  2G

Class of use & Warranty





**80001610** - *Mount Logan Oak*



**80001611** - *Mount Fuji Oak*



**80001612** - *Rain Forest Oak*



**80001614** - *Mount Everest Oak*



Mount Fuji Oak



**80001615** - *Mountain Oak*



**80001616** - *Sprucewood*



**80001617** - *Royal Oak*



**80001618** - *Manor Oak*



**80001619** - *Ocean Oak*



**80001620** - *Field Oak*



**80001621** - *Diamond Oak*



**80001622** - *Dark Onyx Oak*



**80001623** - *Mocca Oak*



Mocca Oak



**80001624** - Quartz Oak



**80001625** - Castle Mountain Oak



**80001626** - Black Forest Oak



Black Forest Oak



**80001627** - Glacial Pine



**80002883** - Highland Oak



**80002885** - Contempo Loft



**80003513** - Contempo Copper



# wood Start Green Design

## wood Start Green Design

Start Green Design is a high performing entry-level solution suitable for residential and moderate traffic commercial areas. Designed to meet the demands of any lifestyle, while also providing a thermal and acoustic comfort, this floating floor offers a selection of wood designs that will complement your space. All Start Green Design visuals are achieved through digital printing high resolution images so no trees are cut down, making this a sustainable option for those looking for the popular wood look but with the comfort and sustainability of cork.

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH RANDOM EMBOSSING
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK INLAY
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY



### PRODUCT INFORMATION

**Dimension** 1220 x 185 mm

**Thickness** 8,5 mm

**Bevel** No bevel

**Finishing**  HRT

**Locking system**  2G

**Class of use & Warranty**





**80002533** - *Woodstock White*



**80002534** - *Woodstock Beige*



**80002535** - *Woodstock Nougat*



**80002537** - *Woodstock Natural*



**80003033** - *Rustic Golden Oak*



**80003034** - *Rustic Nougat Oak*



**80003035** - *Rustic Washed Grey Oak*



**80003036** - *Clean Grey Oak*



# wood Start Resist Eco

Mountain Oak

## wood Start Resist Eco

Start Resist ECO is an entry-level PVC-free floating floor for residential and moderate traffic commercial areas. Its multilayered structure has an integrated cork underlay of 2.2mm which provides comfort and thermal insulation. Designed to last, this cork floor is a great option for those looking for a sustainable solution that combines performance and design. Available in a curated selection of wood visuals to fit any decor style and space.

- 1 PVC-FREE PROTECTIVE WEAR LAYER
- 2 HIGH RESOLUTION DECORATIVE FILM
- 3 NATURAL FIBER CORE
- 4 INTEGRATED CORK UNDERLAY



### PRODUCT INFORMATION

**Dimension** 1220 x 185 mm

**Thickness** 7,5 mm

**Bevel** 4 Sides micro bevel

**Finishing** 

**Locking system**  2G

**Class of use & Warranty**  



**80003129** - *Mountain Oak*



**80003130** - *Sprucewood*



**80003131** - *Highland Oak*



**80003132** - *Manor Oak*



**80003133** - *Ocean Oak*



**80003134** - *Field Oak*



**80003135** - *Mocca Oak*



**80003136** - *Quartz Oak*





# wood Pro

Field Oak

## wood Pro

Wood Pro is a low thickness high performance product, ideal for large installation areas. With a curated selection of wood visuals, this glue down sustainable solution is designed to meet the demands of any project, even in high traffic commercial areas. Wood Pro represents the perfect balance between sustainable performance and design, allowing for the creation of a herringbone pattern..

- 1 SRT NON PVC PROTECTIVE WEAR LAYER
- 2 HIGH RESOLUTION DECORATIVE FILM
- 3 NON PVC CORK RIGID CORE
- 4 INTEGRATED CORK UNDERLAY




### PRODUCT INFORMATION

**Dimension** 1230 x 200 mm

**Thickness** 4 mm

**Bevel** No bevel

**Finishing**  SRT

**Locking system**  2G

**Class of use & Warranty**  23  34  10 YEARS



**80000178** - *Mountain Oak*



**80000179** - *Sprucewood*



**80000181** - *Manor Oak*



**80000182** - *Ocean Oak*



Ocean Oak



**80000183** - *Field Oak*



**80000186** - *Mocca Oak*



**80000187** - Quartz Oak



**80002541** - Contempo Loft



**80002968** - Contempo Copper



**80002872** - Highland Oak



Quartz Oak



# stone Bi natural

Minimal Stone Brown

## stone Bi natural

Bionatural has a 100% natural and fossil plastic free core. Its innovative bio core is made of cork, sugar cane waste and natural materials, with a renewable content above 95%. Bionatural is available in cork, wood and stone visuals. The cork visuals are made using natural cork veneers and the wood and stone visuals are achieved through cutting-edge digital printing 3D embossing technology. Bionatural range will defy your senses due to its level of realism and intricate texture.

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK INLAY
- 4 CORK BIO CORE
- 5 INTEGRATED CORK UNDERLAY



### PRODUCT INFORMATION

**Dimension** 910 x 300 mm

**Thickness** 9,5 mm

**Bevel** 4 Sides Micro bevel

**Finishing**  HRT

**Locking system**  2G

**Class of use & Warranty**    



**80003983** - *Minimal Stone Dark Grey*



Minimal Stone Silver



Minimal Stone Dark Grey



**80003985** - *Minimal Stone Brown*



**80003989** - *Elegant Plaster White*



**80003982** - *Minimal Stone Silver*



**80004004** - *Elegant Plaster Grey*



# stone Hydro Natural

Minimal Stone Chocolate

## stone Hydro Natural

Stone Hydro Natural has the appearance of natural stone achieved through advanced printing technology. It offers the practicality of being waterproof and PVC-free on a sustainable base, making it a resilient and eco-friendly choice.

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK COMPOSITE CORE




### PRODUCT INFORMATION

**Dimension** 910 x 300 mm

**Thickness** 7 mm

**Bevel** 4 Sides Micro bevel

**Finishing** 

**Locking system**  2G

**Class of use & Warranty**





**80003708** - *Minimal Stone Grey*



**80003709** - *Minimal Stone White*



**80003710** - *Minimal Stone Silver*



**80003711** - *Minimal Stone Dark Grey*



**80003722** - *Minimal Stone Chocolate*



**80003723** - *Minimal Stone Brown*



**80003724** - *Basaltina Stone Dark Grey*



**80003725** - *Basaltina Stone Grey*



Minimal Stone Brown




**80003727** - *Elegant Plaster White*



**80003728** - *Elegant Plaster Sand*



**80003729** - *Elegant Plaster Camel*

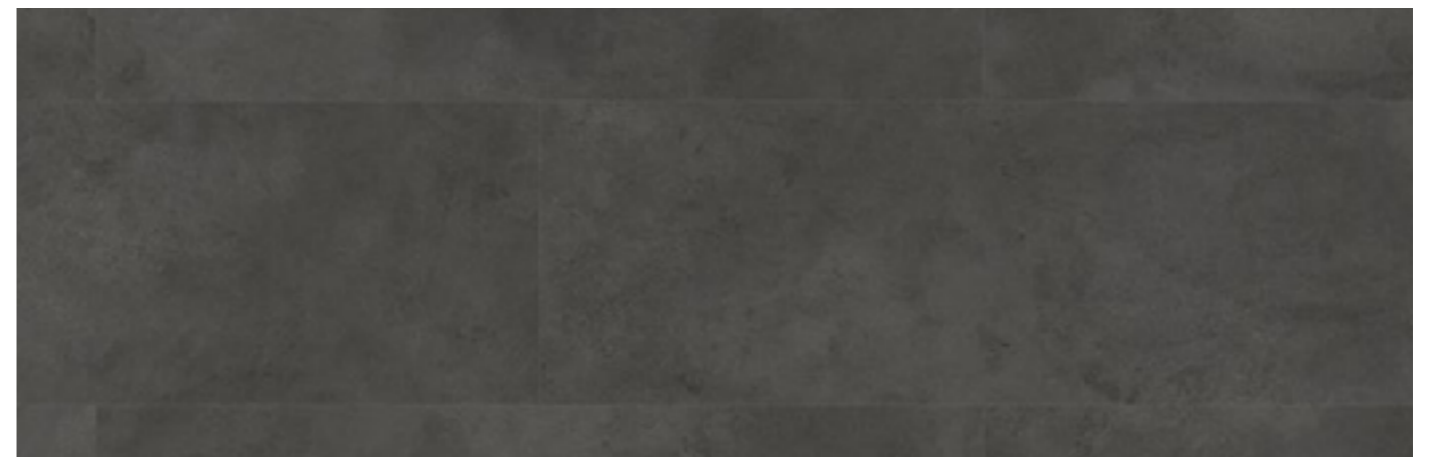

**80003731** - *Elegant Plaster Dark Grey*





**80003732** - *Elegant Plaster Grey*



**80003733** - *Microcement*



**80003734** - *Microcement Greige*



**80003735** - *Microcement Chocolate*



Microcement Chocolate



# stone Inspire

Concrete Urban

## stone Inspire

High end stone designs, with a distinctive look given by the large tile format. Entirely made out of cork, its superior comfort comes from Nature, providing a warm atmosphere, reducing energy costs and creating silent spaces. This flooring solution also contributes for a better future, since it helps the reduction of global warming.

- 1 HRT NON PROTECTIVE WEAR LAYER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK INLAY
- 4 NON PVC CORK RIGID CORE
- 5 INTEGRATED CORK UNDERLAY



### PRODUCT INFORMATION

Dimension	910 x 300 mm
Thickness	9,5 mm
Bevel	4 Sides micro bevel

Finishing 

Locking system  2G

Class of use & Warranty





*Beton Nordic*



*Beton Nordic*



*Beton Urban*



*Beton Corten*



*Beton Midnight*



*Concrete Nordic*



*Concrete Urban*



Concrete Corten



Concrete Corten



Concrete Corten



Azulejo Sand



Azulejo Citizen



Azulejo Forest



Azulejo Cellar



# stone Pure

## stone Pure

High end stone designs, with a distinctive look given by the large tile format. Entirely made out of cork, its superior comfort comes from Nature, providing a warm atmosphere, reducing energy costs and creating silent spaces. This flooring solution also contributes for a better future, since it helps the reduction of global warming.

1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER

2 DIGITAL PRINTING IMAGE ON CORK

3 AGGLOMERATED CORK



### PRODUCT INFORMATION

Dimension 900 x 600 mm

Thickness 8 mm

Bevel No bevel

Finishing



Locking system



Class of use & Warranty





**80002807** - *Marte*



**80000188** - *Beton Nordic*



**80000189** - *Beton Urban*



**80000190** - *Beton Corten*



**80000192** - *Concrete Nordic*



**80000193** - *Concrete Urban*



**80000195** - *Concrete Midnight*



**80000196** - *Azulejo Sand*



80000197 - Azulejo Citizen



80000198 - Azulejo Forest



80000191 - Beton Midnight



80000194 - Concrete Corten



80000199 - Azulejo Cellar



Azulejo Forest




# stone Essence

## stone Essence

Feel the walking comfort and the exceptional thermal insulation, even when walking barefoot. Wicanders stone offers unique stone visuals with the unmatched comfort of cork that will elevate any space while providing a warm atmosphere all year round. The selected stone visuals will give your space a natural look and feel. Floating floor with multilayer cork structure that combines the unmatched properties of cork with the beauty of selected stone visuals that give this solution a natural look and feel.

- 1 PROTECTIVE WEAR LAYER
- 2 HIGH RESOLUTION IMAGE
- 3 CORK COMPOSITE CORE
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY

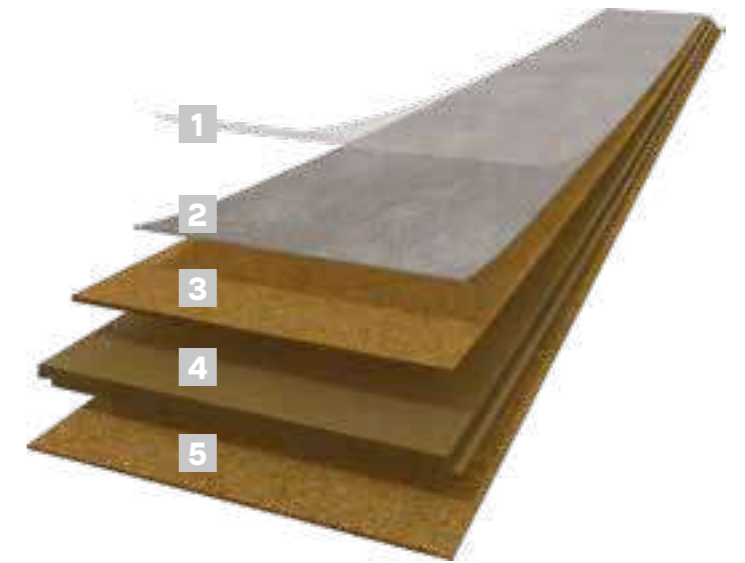


### PRODUCT INFORMATION

**Dimension** 905 x 295 mm

**Thickness** 10,5 mm

**Bevel** No bevel

**Finishing** 

**Locking system**  2G

**Class of use & Warranty**







**80001452** - *Beton Nordic*




**80001457** - *Beton Urban*



**80001458** - *Beton Corten*



**80001459** - *Beton Midnight*

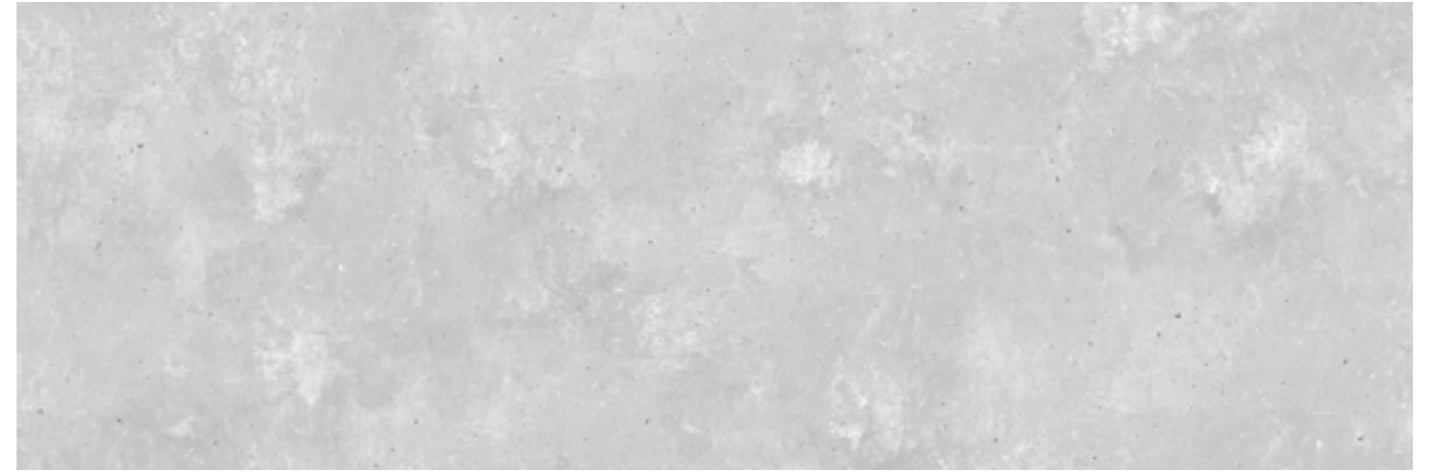

**80001460** - *Concrete Nordic*



**80001461** - *Concrete Urban*



**80001462** - *Concrete Corten*



Concrete Corten



**80001463** - *Concrete Midnight*



**80001464** - *Azulejo Sand*



**80001465** - *Azulejo Citizen*



**80001466** - *Azulejo Forest*



Azulejo Cellar



**80001467** - *Azulejo Cellar*



**80002806** - *Marte*



# stone Natural




## stone Natural

Stone Natural floor combines impressive durability with a stone texture design achieved through advanced digital printing technology. It's also PVC-free, making it not only visually appealing but also environmentally friendly. The cork based multilayered structure provides added thermal and acoustic comfort.

- 1 PROTECTIVE WEAR LAYER
- 2 HIGH RESOLUTION IMAGE
- 3 CORK COMPOSITE CORE
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY



### PRODUCT INFORMATION

Dimension	905 x 295
Thickness	9 mm
Bevel	4 Sides micro bevel
Finishing	 HRT
Locking system	 2G
Class of use & Warranty	    



**80003892** - *Minimal Stone Grey*



**80003893** - *Minimal Stone White*



**80003898** - *Basaltina Stone Dark Grey*



**80003899** - *Basaltina Stone Grey*



Minimal Stone Grey



Microcement



**80003901** - *Elegant Plaster White*



**80003903** - *Elegant Plaster Camel*



**80003907** - *Microcement*



**80003908** - *Microcement Greige*



# TERRAZZO

Capsule Collection








## TERRAZZO


Inspired by the traditional Italian pattern, the Terrazzo Capsule collection recreates that recognizable look onto cork flooring. In the same way, the original Terrazzo was made by reusing remnants of marble, this collection reuses natural pieces of cork. Its premise is to offer a superior level of comfort without compromising on design. Complete with 8 different and versatile designs, from Element Mint, a lighter and more subtle version, to Twist Terracota, a darker design with a more noticeable pattern, there is an option for every space. This collection reinvents a popular design in a much more comfortable and sustainable base - It may look like marble, but it feels like cork. Terrazzo Capsule Collection designed by VICARA studio.

- 1 HRT NON PVC PROTECTIVE SURFACE
- 2 PAINTED CORK VENEER
- 3 AGGLOMERATED CORK




### PRODUCT INFORMATION

Dimension	900 x 600
Thickness	8 mm
Bevel	No bevel
Finishing	
Locking system	
Class of use & Warranty	    

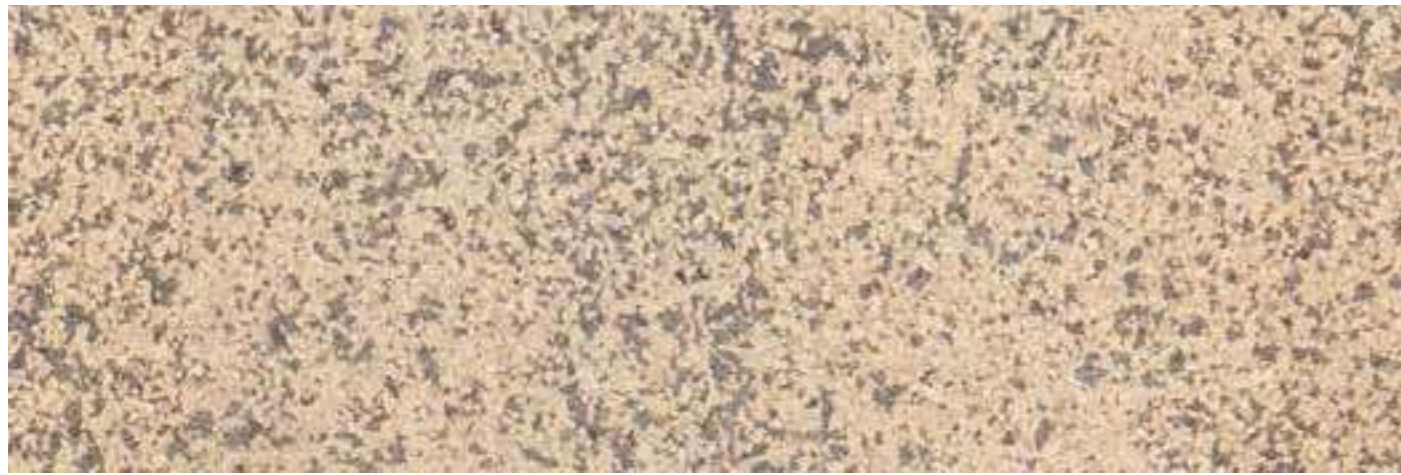

**80003218** - *Element Cream*

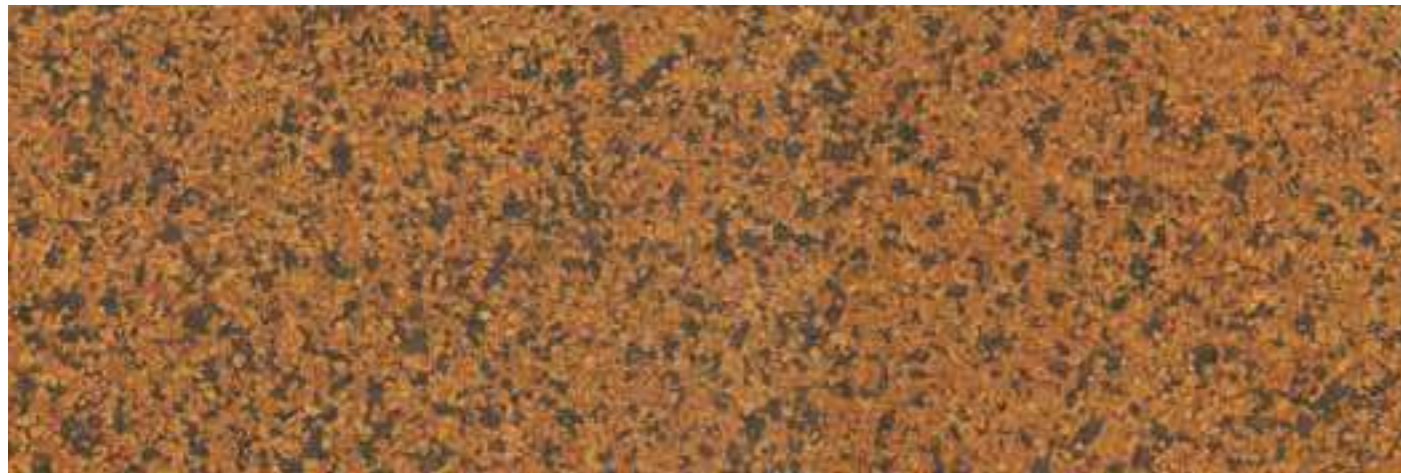

**80003219** - *Element Terracotta*



**80003220** - *Element Mint*




**80003221** - *Element Calm Sky*



Element Cream



80003222 - *Twist Cream*

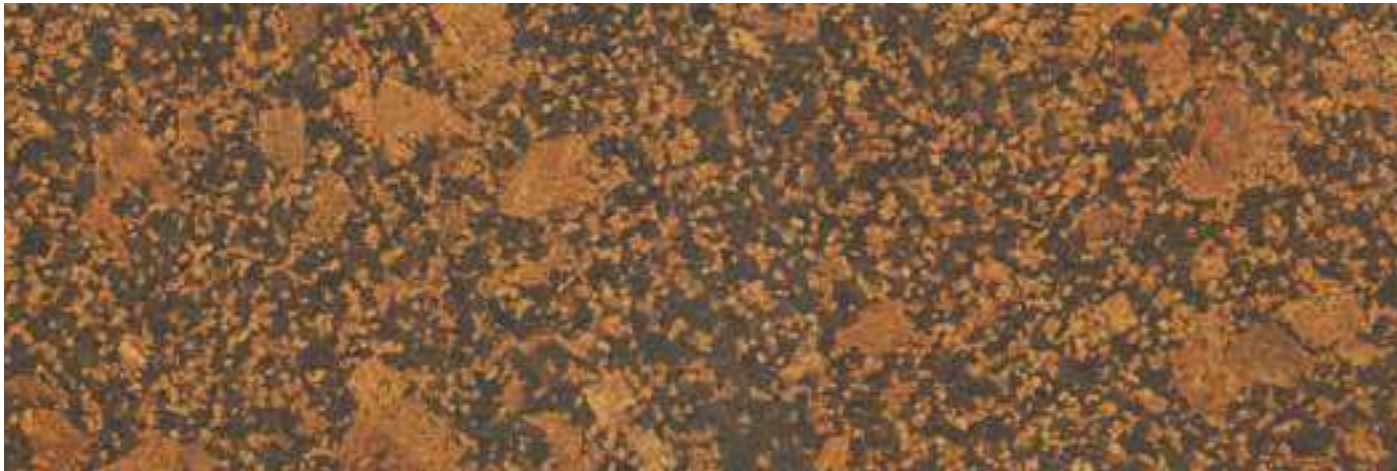

80003223 - *Twist Terracotta*



80003224 - *Twist Mint*



80003225 - *Twist Calm Sky*



Twist Terracotta





# dekwall

Flores White Waxed

## dekwall


A collection of wall coverings with cork visuals that will create the perfect atmosphere. Available in several colors and designs, dekwall will provide a sense of silence and thermal insulation due to the unique properties of cork. Wall coverings are available with cork looks – natural or painted, and are protected by wax or varnish finishings.

- 1 PROTECTIVE FINISH
- 2 GENUINE CORK VENEER
- 3 CORK AGGLOMERATED CORE



### PRODUCT INFORMATION

Dimension	600 x 300 mm
Thickness	3 mm
Bevel	No Bevel

Finishing	 WAXED  PU PF
-----------	---



**81000000** - *Fiord White Waxed*



**81000001** - *Malta Moonlight*



**81000004** - *Bamboo Artica*



**81000056** - *Flores White*



**81000057** - *Hawai Natural*



**81000058** - *Fiord Natural*



**81000061** - *Fiord Exclusive*



**81000062** - *Hawai Black Pearl*



**81000066** - *Malta Chestnut*



**81000067** - *Malta Champagne*



**81000071** - *Melville*



**81000073** - *Tenerife*



Bali



**81000074** - *Bali*



**81000080** - *Cayman*



**81000087** - *Hawai exclusive*



**81000094** - *Bamboo Terra*



**81000095** - *Bamboo Toscana*



**81000102** - *Stone Art Oyster*



**81000104** - *Stone Art Pearl*



**81000106** - *Stone Art Platinum*



*Burel Cork Wall*  
— CAPSULE COLLECTION —

## Burel Cork Wall

The Burel Cork Wall capsule collection combines two of the most traditional Portuguese materials: cork and burel. Mixing cork with colored wool, Burel Cork Wall presents a unique collection, that preserves the century-old traditions of Portuguese manufacturing. Born from a collaborative system of circular production, the waste from both industries are used to create an innovative product, a wall covering solution that will transform any space in a welcoming environment.

- 1 PROTECTIVE FINISH
- 2 CORK AND BUREL AGGLOMERATED CORE
- 3 CORK AGGLOMERATE CORE




### PRODUCT INFORMATION

**Dimension** 600 x 300 mm

**Thickness** 3mm

**Bevel** No bevel

**Finishing**



WAXED

\*There is a minimum order quantity of 100m<sup>2</sup> for this product.



81000355 - *Burel Ocean's Deep*




Burel Ocean's Deep



81000356 - *Burel Forest*



Burel Forest

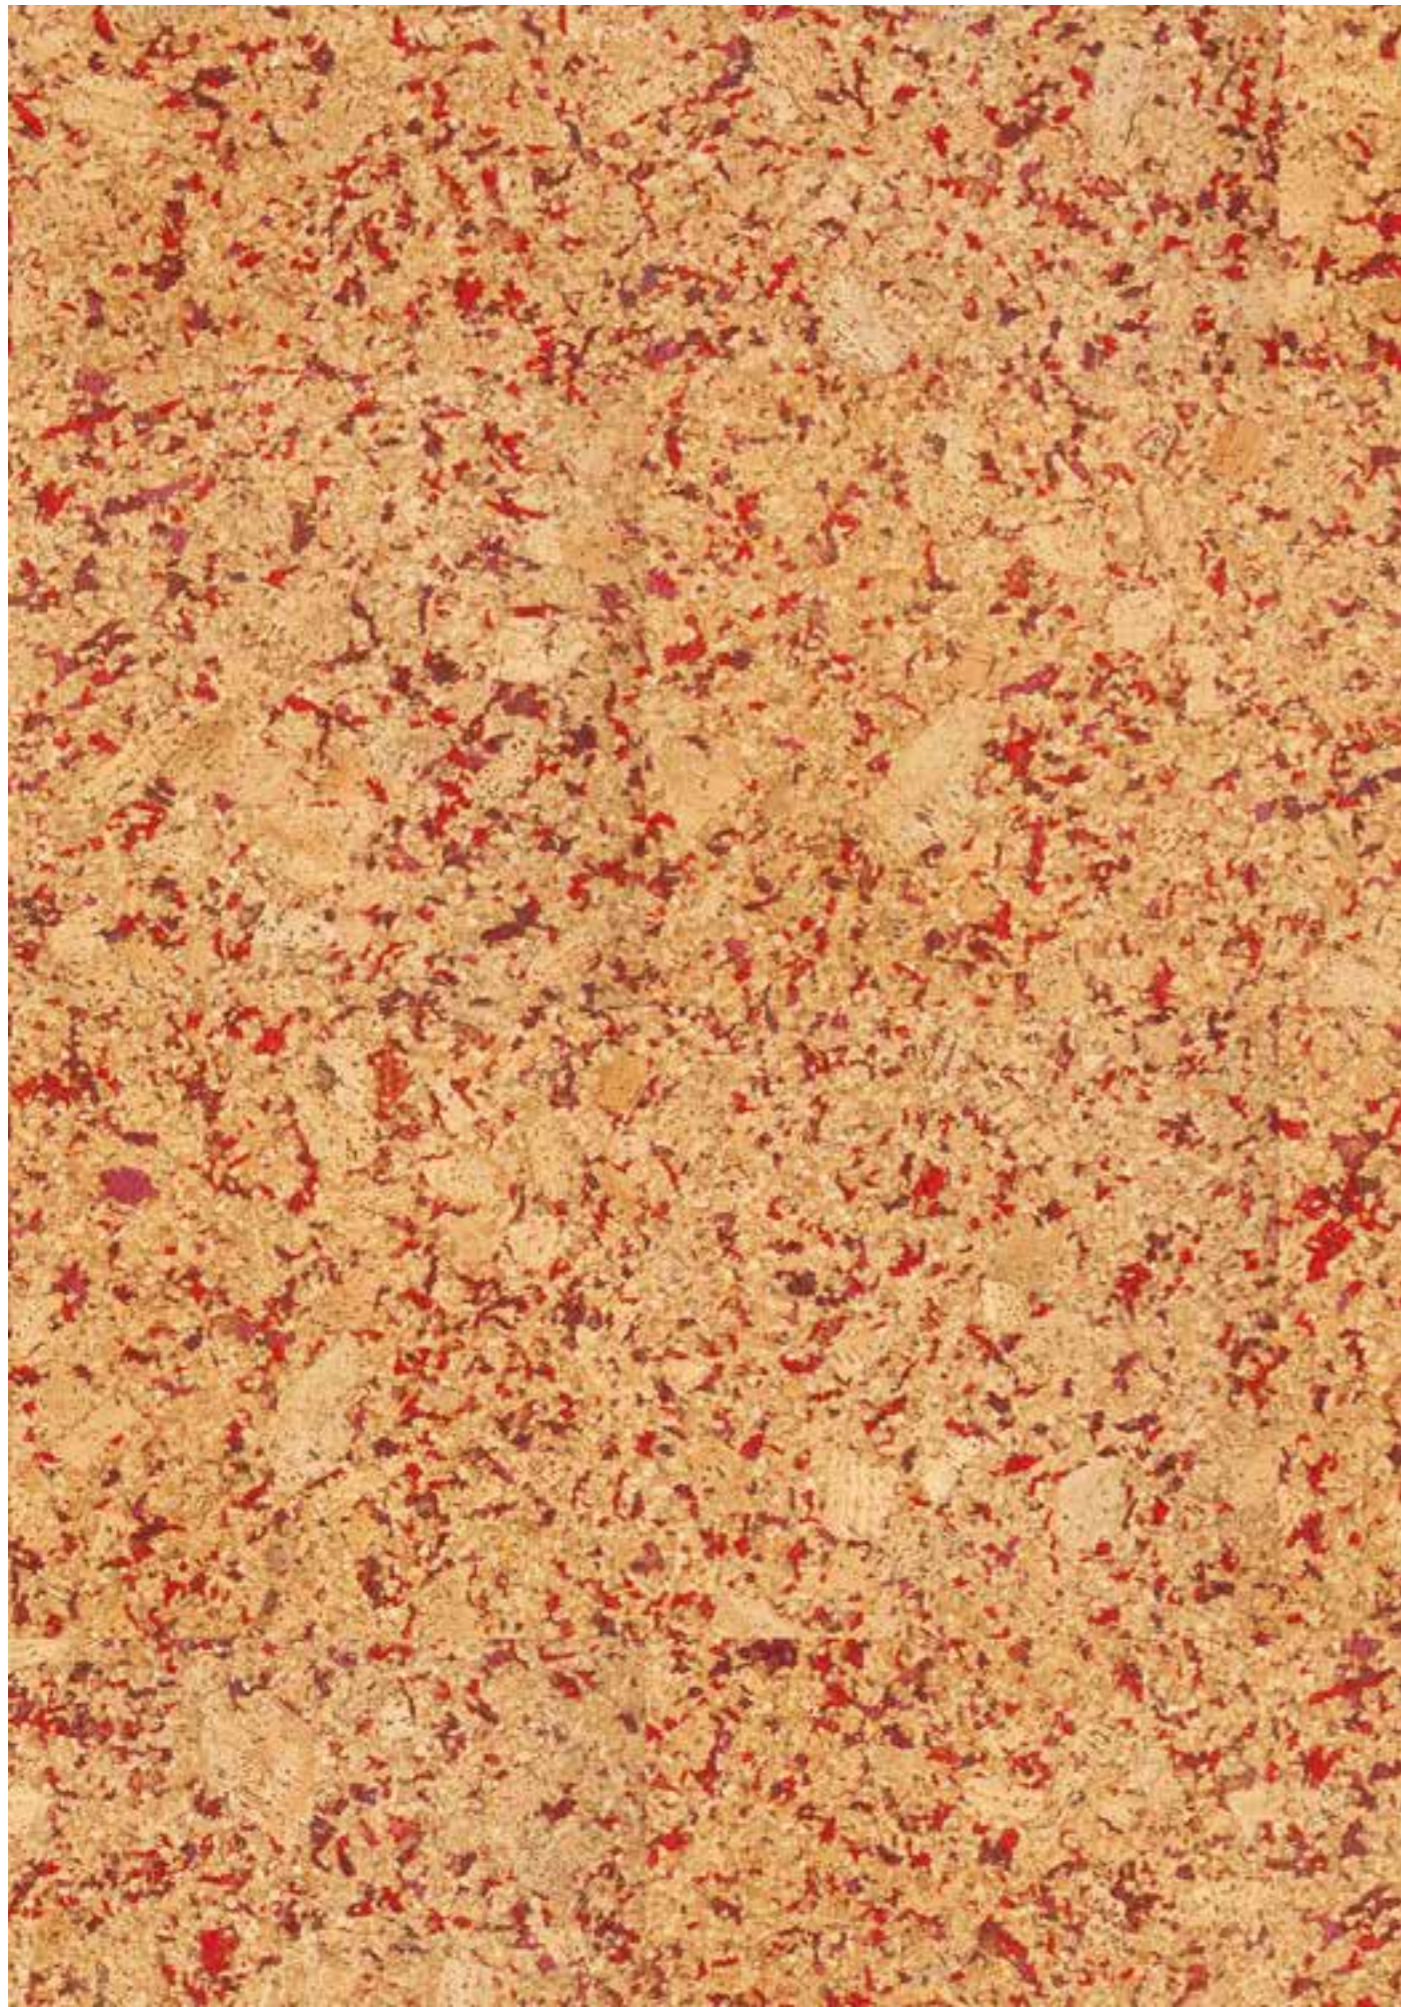

81000357 - Burel Scarlet Red



Burel Scarlet Red





81000358 - Burel Sunsets















Burel Sunsets



81000359 - *Burel Sideral Grey*



Burel Sideral Grey

	<p><b>CE</b> CE marking indicates conformity with health, safety and environmental standards for products sold within the European Economic Area (EEA).</p>
	<p><b>DAS KORK</b> Assures the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.</p>
	<p><b>FRENCH REGULATION ON VOC EMISSIONS</b> French certification that classifies products according to their level of voc emissions. Our products have been classified at the highest level (A+).</p>
	<p><b>TÜV-PROFICERT</b> Tuv-Proficert is a transnational certificate for voc-emission and air quality, certifying that a product complies with different national regulations.</p>
	<p><b>BLUE ANGEL</b> Voluntary certification that follows strict environmental standards and is recognized as a reference guide for a more sustainable way of life.</p>
	<p><b>GREENGUARD CERTIFICATION</b> North-american certification that identifies products that have low chemical emissions, improving the air in which they are used. Our products are awarded with the GOLD certification.</p>
	<p><b>EPD (ENVIRONMENTAL PRODUCT DECLARATION)</b> Third-party independent evaluation that reports environmental data of products based on their life cycle assessment.</p>
	<p><b>LEED</b> Wicanders products contribute with points in the following categories: Materials and Resources / Indoor Environmental Quality.</p>
	<p><b>BREEAM</b> Wicanders products contribute with points in the following categories: Health and well being / Materials.</p>
	<p><b>M1</b> Presents emission requirements for building materials, fixture and furniture used in office and residential buildings with respect to good indoor air quality.</p>
	<p><b>HEALTH PRODUCT DECLARATION</b> Provides full disclosure of potential chemicals of concern in products by comparing product ingredients against a set of prioritized red lists.</p>
	<p><b>NORDIC SWAN ECOLABEL</b> Is one of the world's toughest environmental certifications, and a powerful tool for producers and brand owners, that offers a recipe on how to reduce the environmental impact from production to consumption of goods, and credible third party certified guidance for their consumers and professional buyers.</p>

# WICANDERS WISE

\*Clarification: carbon sequestration potential

## 1. Study

The allegations regarding carbon sequestration potential are based on the Environmental Footprint study conducted by EY, available at link <https://www.wicanders.com/downloads/sustainability-documents> (hereinafter the "Study") carried out exclusively for Corticeira Amorim, following the methodology and assumptions mentioned therein and in a Cradle to Gate or Cradle to Grave approach, and cannot be used for any other company or product. The Study has not been verified by any regulatory, certifying or similar body that is not part of EY. The Study also considered a sensitivity analysis and simulation relating to the carbon sequestration of cork oak forests to provide a broader perspective on the global balance of Greenhouse Gases (GHG). This relationship is simulated by analysing carbon sequestration scenarios that can be associated with cork products: i) cork production is undoubtedly the main economic activity of a cork oak forest under exploitation, and it can be argued that cork processing companies are a catalyst in creating economic interest for cork oak forest owners to maintain cork oak exploitation; ii) the Product Environmental Footprint Category Rule (PEFCR) for the wine sector states that the carbon contained in cork oaks should be factored in the analysis as additional environmental information, since their carbon storage exceeds 100 years. Thus, the study considered the carbon sequestration of the cork oak forest associated with cork production.

## 2. Conclusions

The conclusions on the estimation of the carbon sequestration potential of Corticeira Amorim's Wicanders Wise Inspire and Pure ranges (hereinafter "Conclusions") are therefore based (i) The sources of emissions and assumptions mentioned in the Study, in the locations and period referred to therein, such as: consumption of raw materials, energy consumption and transport of raw materials, products and by products. (ii) Carbon sequestration of the cork oak forest, indirectly attributed to Corticeira Amorim's products, considering that its activities contribute to the exploitation of the cork oak forest. If the company, product and/or these facts, circumstances or hypotheses are changed, the conclusions will necessarily be different.

## 3. Purpose

The Study and Conclusions are intended to provide non exhaustive information and conclusions based on the facts, assumptions and methodologies accepted by EY and do not represent or should not be construed as advice, statement, warranties or commercial representation as to the quality and/or ownership of the Product. The results and conclusions of the Study should be considered altogether and not separately. Although Corticeira Amorim believes in the reasonableness of the assumptions, circumstances and methodologies used in the Study, they are all inherently subject to risks, uncertainties, contingencies and other important factors, known or unknown, which may be difficult or impossible to predict, such as the company's sales or financial strategy, national and international economic and financial market conditions, technology, legal and regulatory conditions, the evolution of the utilities sector, hydrological and climatic conditions, the cost of raw materials and energy, among others, which may lead to significant differences between the actual results and the claims and conclusions made. Corticeira Amorim cannot be held liable for any direct, indirect or other damages resulting from the use of the Conclusions and/or the associated Study, either in relation to counterparties or third parties to whom these Conclusions and/or the associated Study have been shown or disclosed in any way.

Scan for more information



---

**WICANDERS**  
**WISE**

TECHNICAL DATA SHEET

# cork Bio natural XL

Technical Data Sheet	Standard	Unit / Requirement	Value
Dimension (LxWxT)	-	-	1525x195x8.5mm
Mass per unit	-	Kgs / m <sup>2</sup>	8.01
Packaging (box / pallet)	-	m <sup>2</sup>	2,082 / 91,592
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

## General properties - EN 16511

Thickness, t -	ISO 24337	$\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm	Complies
Length, l	ISO 24337	$\leq 1500$ mm: $\Delta l \leq 0,5$ mm / $> 1500$ mm: $\Delta l \leq 0,3$ mm/m	Complies
Width, w	ISO 24337	$\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm	Complies
Squareness, q	ISO 24337	$max \leq 0,20$ mm	Complies
Straightness, s	ISO 24337	$max \leq 0,30$ mm/m	Complies
Openings, o	ISO 24337	$max \leq 0,20$ mm	Complies
Height difference, h	ISO 24337	$h_{max} \leq 0,15$ mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies

## Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	$\geq 5$ 000 cycles	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	$\geq 1$ 600 mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	Groups 1 and 2: grade 5 Group 3: grade 4	Complies
Residual indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies
Swelling	ISO 24336	$\leq 18$ %	Complies
Dimensional stability due to variation of temperature	EN ISO 23999	$\leq 0,25$ %	Complies
Effect of furniture leg	EN 424	-	No Visible Damage

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Bfl-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	% mg/kg	Undetectable

## Additional properties

Impact sound reduction	EN ISO 10140	dB ( $\Delta L_w$ )	18
Walking noise	EN 16205:2020	dB %	Reduction improvement -15
Thermal resistance (Thermal conductivity)	EN 12667	((m <sup>2</sup> K)/W)	R $\leq 0,150$

NOTE:

(a) Grade 5 - No change / Grade 4 - Slight change / Grade 3 - Moderate change / Grade 2 - Considerable change / Grade 1 - Strong change

1 HIGH QUALITY PROTECTIVE VARNISH

2 NATURAL CORK VENEER

3 CORK INLAY

4 CORK BIO CORE

5 INTEGRATED CORK UNDERLAY



# cork Inspire

Technical Data Sheet	Standard	Unit / Requirement	Value
Dimension (LxWxT)	-	mm	1225x195x7
Mass per unit	-	Kgs / m <sup>2</sup>	7,4
Packaging (box / pallet)	-	m <sup>2</sup>	1,862 / 81,928
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

## General properties - EN 16511

Thickness, t -	ISO 24337	$\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm	Complies
Length, l	ISO 24337	$\leq 1500$ mm: $\Delta l \leq 0,5$ mm / $> 1500$ mm: $\Delta l \leq 0,3$ mm/m	Complies
Width, w	ISO 24337	$\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm	Complies
Squareness, q	ISO 24337	$max \leq 0,20$ mm	Complies
Straightness, s	ISO 24337	$max \leq 0,30$ mm/m	Complies
Openings, o	ISO 24337	$max \leq 0,20$ mm	Complies
Height difference, h	ISO 24337	$h_{max} \leq 0,15$ mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies

## Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	$\geq 5$ 000 cycles	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	$\geq 1$ 600 mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	Groups 1 and 2: grade 5 Group 3: grade 4	Complies
Residual indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies
Swelling	ISO 24336	$\leq 18$ %	Complies
Dimensional stability due to variation of temperature	EN ISO 23999	$\leq 0,25$ %	Complies
Effect of furniture leg	EN 424	-	No Visible Damage

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Bfl-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

## Additional properties

Impact sound reduction	EN ISO 10140	dB ( $\Delta L_w$ )	18
Walking noise	IHD-W431	dB %	Reduction improvement 12,3 dB Difference of loudness 57%
Thermal conductivity	EN 12667	W/(mK)	0,111
Thermal resistance	EN 12667 / ISO 1957	(m <sup>2</sup> K)/W	0,05

1 HRT NON PVC PROTECTIVE SURFACE

2 NATURAL CORK VENEER

3 CORK INLAY

4 NON PVC CORK RIGID CORE

5 INTEGRATED CORK UNDERLAY



# cork Essence

Technical Data Sheet	Standard	Unit / Requirement	Value
Dimension (LxWxT)	-	mm	905x295x10,5mm
Mass per unit	-	Kgs / m <sup>2</sup>	7,68
Packaging (box / pallet)	-	m <sup>2</sup>	2,136 / 111,072 - 905x295x10,5mm
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

## General properties - EN 12104 - EN 20326

Thickness, t -	EN ISO 24346	± 0,25	Complies
Length, l	EN ISO 24342	+/- 0.5%	Complies
Width, w	EN ISO 24342	+/- 0.10%	Complies
Squareness, q	EN ISO 24342	max ≤ 0,20 mm	Complies
Straightness, s	EN ISO 24342	max ≤ 0,30 mm/m	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies
Dimensional Stability	ISO 20326 (Anex C)	≤ 0,25 %	Complies

## Classification properties - EN 12104 - EN 20326

Wear resistance IP	EN 14354 (Annex D)	≥ 2 500 cycles	Complies
Castor chair resistance	ISO 4918	25 000 cycles	Complies
Simulated movement of a furniture leg	Visual	No damage shall be visible after testing with a foot type 2	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,3 mm	Complies
Swelling	ISO 24336	≤ 18%	Complies

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	C fl-s1
Slip Classification+A55	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	% mg/kg	Undetectable

## Additional properties

Impact sound reduction	EN ISO 10140	dB (Δ Lw)	16
Walking noise	IHD-W431	dB %	Reduction improvement 13,2 dB Difference of loudness 51,6%
Thermal resistance (Thermal conductivity)	EN ISO 10456	m <sup>2</sup> ·K/W	R ≤ 0,150

# cork Go

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	-	905x295x10,5mm
Mass per unit	-	Kgs / m <sup>2</sup>	7,68
Packaging (box / pallet)	-	m <sup>2</sup>	2,136 / 111,072
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	-

## General properties - EN 12104 - EN 20326

Thickness, t -	EN ISO 24346	± 0,25	Complies
Length, l	EN ISO 24342	+/- 0.5%	Complies
Width, w	EN ISO 24342	+/- 0.10%	Complies
Squareness, q	EN ISO 24342	< 0.2	Complies
Straightness, s	EN ISO 24342	≤ 0,30	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies
Dimensional Stability	ISO 20326 (Anex C)	≤ 0,25 %	Complies

## Classification properties - EN 12104 - EN 20326

Wear resistance IP	EN 14354 (Annex D)	≥ 1 000 cycles	Complies
Castor chair resistance	ISO 4918	25 000 cycles	Complies
Simulated movement of a furniture leg	Visual	No damage shall be visible after testing with a foot type 2	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,4 mm	Complies
Swelling	ISO 24336	≤ 20%	Complies


## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Dfl-s1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/kg	Undetectable


## Additional properties

Impact sound reduction	EN ISO 10140	dB (Δ Lw)	16
Walking noise	IHD-W431	dB %	13,2 51,6
Thermal resistance (Thermal conductivity)	EN ISO 10456	m <sup>2</sup> ·K/W	R ≤ 0,150

- 1 PROTECTIVE SURFACE
- 2 GENUINE CORK VENEER
- 3 AGGLOMERATED CORK
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY

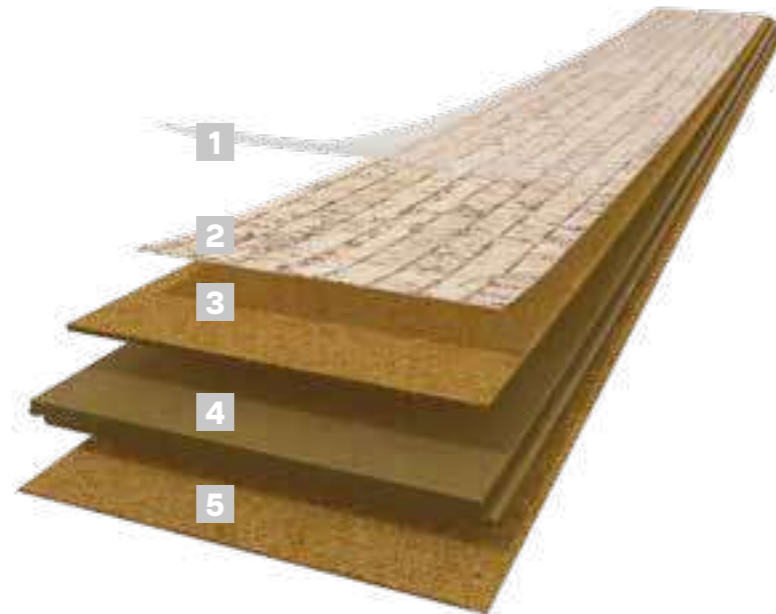

- 1 PROTECTIVE SURFACE
- 2 GENUINE CORK VENEER
- 3 AGGLOMERATED CORK
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY

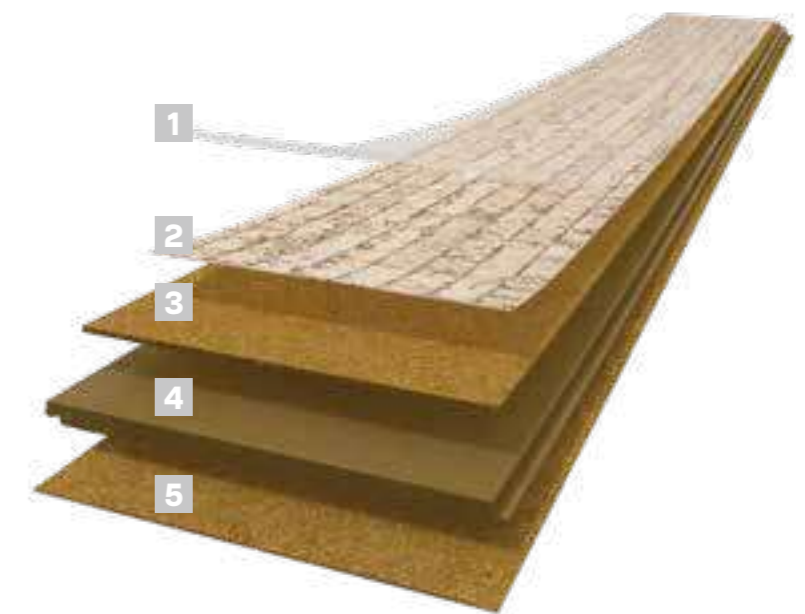

# cork Pure 4mm

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	mm	300x300x4 600x150x4 600x304x4 600x450x4 600x600x4 900x300x4
Mass per unit	-	Kgs / m <sup>2</sup>	2,203
Packaging (box / pallet)	-	m <sup>2</sup>	300x300x4 - 7,92 / 237,6 600x150x4 - 7,92 / 237,6 600x300x4 - 7,92 / 237,6 600x450x4 - 8,91 / 249,48 600x600x4 - 11,52 / 276,48 900x300x4 - 10,8 / 216
Level of use Domestic	ISO 10874	Class	Sanded - NA PU FINISHED - NA PU PF - NA HRT - 23
Level of use Commercial	ISO 10874	Class	-

#### General properties - EN 12104


Side length Squareness and Straightness of edges for side length ≤ 400 mm / > 400 mm	EN ISO 24342	deviation from nominal: ≤ 0,2 % up to 1,0 mm maximum deviation allowed: ≤ 0,5 / ≤ 1,0	Complies
Overall thickness mm	EN ISO 24346	≥ 4,0	Complies
Apparent density average - individual results	EN ISO 23997	≥ 450 kg/m <sup>3</sup>	Complies
Dimensional stability %	EN ISO 23999	≤ 0,25	Complies
Curling mm	EN ISO 23999	≤ 2	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,4	Complies
Simulated movement of a furniture leg	EN 424	No damage shall be visible after testing with type 2 foot	No visible damage

#### Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	PU FINISHED - CfI-S1 HRT - CfI-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

#### Additional properties

Impact sound reduction	EN ISO 10140	dB (Δ Lw)	12
Walking noise	IHD-W431	dB %	Reduction improvement 15,3 dB Difference of loudness 65%
Thermal resistance	EN 12667 / ISO 1957	(m <sup>2</sup> K)/W	0,15
Stains Resistance	ISO 26987(a)	Grade	Grade 0 - Unchanged

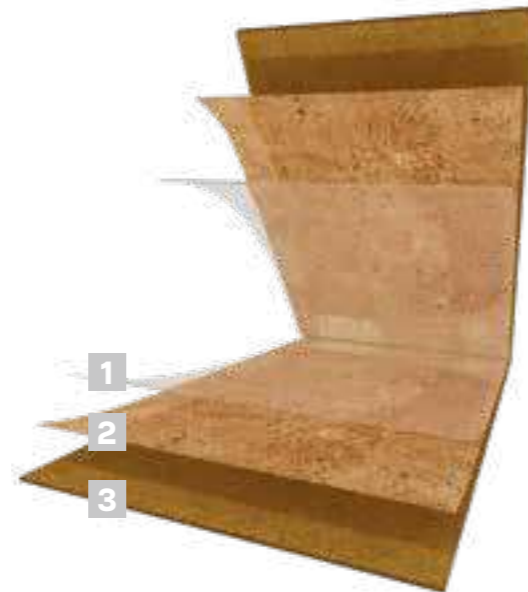

1 PROTECTIVE SURFACE

2 GENUINE CORK VENEER

3 AGGLOMERATED CORK

# cork Pure 6mm

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	mm	300x300x6 600x150x6 600x300x6 600x600x6 900x150x6 900x300x6 900x600x6
Mass per unit	-	Kgs / m <sup>2</sup>	300x300x6 - 2,203 600x150x6 - 3,3 600x300x6 - 3,3 600x600x6 - 3,045 900x150x6 - 3,3 900x300x6 - 3,3 900x600x6 - 3,3
Packaging (box / pallet)	-	m <sup>2</sup>	300x300: 5,40 / 129,60 600x150: 5,40 / 162,00 600x300: 5,40 / 129,60 600x600: 3,78 / 90,72 900x300: 7,56 / 181,44 900x600: 14,58 / 174,96
Level of use Domestic	ISO 10874	Class	Sanded - NA PU PF - NA HRT - 23
Level of use Commercial	ISO 10874	Class	Sanded - NA PU PF - NA HRT - 33

#### General properties - EN 12104

Side length Squareness and Straightness of edges for side length ≤ 400 mm / > 400 mm	EN ISO 24342	deviation from nominal: ≤ 0,2 % up to 1,0 mm maximum deviation allowed: ≤ 0,5 / ≤ 1,0	Complies
Overall thickness mm	EN ISO 24346	≥ 6,0	Complies
Apparent density average - individual results	EN ISO 23997	≥ 500 kg/m <sup>3</sup>	Complies
Wear resistance IP	EN 14354 (Annex D)	≥ 7 500 cycles	Complies
Dimensional stability %	EN ISO 23999	≤ 0,25	Complies
Curling mm	EN ISO 23999	≤ 2	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,2	Complies
Simulated movement of a furniture leg	EN 424	No damage shall be visible after testing with type 2 foot	No visible damage

#### Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	PU FINISHED - CfI-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

#### Additional properties

Impact sound reduction	EN ISO 10140	dB (Δ Lw)	14
Walking noise	EN ISO 10140	RWS	42,2 (Stone)
Thermal resistance (Thermal Conductivity)	EN ISO 10456	m <sup>2</sup> K/W	Tests on going

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	mm	600x600x8
Mass per unit	-	Kgs / m <sup>2</sup>	4,4
Packaging (box / pallet)	-	m <sup>2</sup>	5,76 / 138,24
Level of use Domestic	ISO 10874	Class	PU PF - NA HRT - 23
Level of use Commercial	ISO 10874	Class	PU PF - NA HRT - 33
<b>General properties - EN 12104</b>			
Side length Squareness and Straightness of edges for side length ≤ 400 mm / > 400 mm	EN ISO 24342	deviation from nominal: ≤ 0,2 % up to 1,0 mm maximum deviation allowed: ≤ 0,5 / ≤ 1,0	Complies
Overall thickness mm	EN ISO 24346	≥ 6,0	Complies
Apparent density average - individual results	EN ISO 23997	≥ 500 kg/m <sup>3</sup>	Complies
Wear resistance IP	EN 14354 (Annex D)	≥ 7 500 cycles	Complies
Dimensional stability %	EN ISO 23999	≤ 0,25	Complies
Curling mm	EN ISO 23999	≤ 2	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,2	Complies
Simulated movement of a furniture leg	EN 424	No damage shall be visible after testing with type 2 foot	No visible damage
<b>Safety properties - EN 14041</b>			
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	PU FINISHED - Dfl-S1 HRT - CfI-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable
<b>Additional properties</b>			
Impact sound reduction	EN ISO 10140	dB (Δ Lw)	14
Walking noise	EN ISO 10140	RWS	Tests on going
Thermal resistance (Thermal Conductivity)	EN ISO 10456	m <sup>2</sup> K/W	Tests on going

Technical Data Sheet	Standard	Unit/Requirement	Value			
Dimension	-	mm	FLOOR   900 x 600 x 8		WALL   600 x 300 x 3	
<b>Finishing</b>			PUPF	HRT	PUPF	WAXED
Mass per Unit	-	kgs/m <sup>2</sup>	4,48		4,48	
Packaging (box/pallet)	-	m <sup>2</sup>	3,78 / 136,08		5,4 / 129,6	
Level of use Domestic	ISO 10874	Class	23*	23	23*	23
Level of use Comercial	ISO 10874	Class	-	33	-	33
<b>General Properties - EN 12104</b>						
Side length Squareness and Straightness of edges for side length ≤ 400 mm / > 400 mm	EN ISO 24342	deviation from nominal: ≤ 0,2 % up to 1,0 mm maximum deviation allowed: ≤ 0,5 / ≤ 1,0	Complies	Complies	Complies	Complies
Overall thickness mm	EN ISO 24346	≥ 4,0	Complies	Complies	Complies	Complies
Apparent density average - individual results	EN ISO 23997	≥ 450 kg/m <sup>3</sup>	Complies	Complies	Complies	Complies
		≥ 500 kg/m <sup>3</sup>	n.a.	Complies	n.a.	Complies
Wear resistance IP	EN 14354 (Annex D)	≥ 1000 cycles (class 23)	Complies	Complies	Complies	Complies
		≥ 7000 cycles	-	Complies	-	Complies
Dimensional stability %	EN ISO 23999	≤ 0,25	Complies	Complies	Complies	Complies
Curling mm	EN ISO 23999	≤ 2	Complies	Complies	Complies	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,4	Complies	Complies	Complies	Complies
		≤ 0,2	n.a.	Complies	n.a.	Complies
Simulated movement of a furniture leg	EN 424	No damage shall be visible after testing with type 2 foot	No visible damage	No visible damage	No visible damage	No visible damage
<b>Safety properties - EN 14041</b>						
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Cfl-S1	Cfl-S1	Cfl-S1	Cfl-S1
Slip Classification	EN 13893	Class	DS	DS	DS	DS
Formaldehyde emission	EN 717-1	Class	E1	E1	E1	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable	Undetectable	Undetectable	Undetectable
<b>Additional properties</b>						
Impact sound reduction	EN ISO 10140	dB (Δ Lw)	13	13	13	13
Walking noise	IHD-W431	dB	19,1	19,1	19,1	19,1
		%	70	70	70	70
Thermal resistance (Thermal conductivity)	EN ISO 10456	(m <sup>2</sup> K)/W	0,10	0,10	0,10	0,10

\* Must be varnished on site with minimum 1 coat of W-2000 or another recommended varnish.

- 1 PROTECTIVE SURFACE
- 2 GENUINE CORK VENEER
- 3 AGGLOMERATED CORK



- 1 PROTECTIVE FINISH
- 2 GENUINE CORK VENEER
- 3 CORK AGGLOMERATED CORE



# wood Bio natural XL

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	0	mm	1525x195x9,5mm
Mass per unit	-	Kgs/m <sup>2</sup>	9,2
Packaging (box / pallet)	-	M2	1,784 / 78,507
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

## General properties - EN 16511

Thickness, t -	ISO 24337	" $\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm"	Complies
Length, l	ISO 24337	" $\leq 1500$ mm: $\Delta l \leq 0,5$ mm / $> 1500$ mm: $\Delta l \leq 0,3$ mm/m"	Complies
Width, w	ISO 24337	" $\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm"	Complies
Squareness, q	ISO 24337	max $\leq 0,20$ mm	Complies
Straightness, s	ISO 24337	max $\leq 0,30$ mm/m	Complies
Openings, o	ISO 24337	max $\leq 0,20$ mm	Complies
Height difference, h	ISO 24337	hmax $\leq 0,15$ mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies

## Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	$\geq 5000$ cycles	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	$\geq 1600$ mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	"Groups 1 and 2: grade 5 Group 3: grade 4"	Complies
Residual indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies
Swelling	ISO 24336	$\leq 18$ %	Complies
Dimensional stability due to variation of temperature	EN ISO 23999	$\leq 0,25$ %	Complies
Effect of furniture leg	EN 424	-	No Visible Damage

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Cfl-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

## Additional properties

Impact sound reduction	EN ISO 10140	dB ( $\Delta L_w$ )	18
Walking noise	EN16205:2020	dB	Reduction improvement - 15
Thermal resistance (Thermal conductivity)	EN 12667 / ISO 1957	(m <sup>2</sup> K)/W	R $\leq 0,150$

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK INLAY
- 4 CORK BIO CORE
- 5 INTEGRATED CORK UNDERLAY



# wood Inspire Natural

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	mm	1225x195x8,5mm
Mass per unit	-	Kgs/m <sup>2</sup>	8,6
Packaging (box / pallet)	-	M2	1,911 / 84,084
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

## General properties - EN 16511

Thickness, t -	ISO 24337	" $\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm"	Complies
Length, l	ISO 24337	" $\leq 1500$ mm: $\Delta l \leq 0,5$ mm / $> 1500$ mm: $\Delta l \leq 0,3$ mm/m"	Complies
Width, w	ISO 24337	" $\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm"	Complies
Squareness, q	ISO 24337	max $\leq 0,20$ mm	Complies
Straightness, s	ISO 24337	max $\leq 0,30$ mm/m	Complies
Openings, o	ISO 24337	max $\leq 0,20$ mm	Complies
Height difference, h	ISO 24337	hmax $\leq 0,15$ mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies

## Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	$\geq 5000$ cycles	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	$\geq 1600$ mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	"Groups 1 and 2: grade 5 Group 3: grade 4"	Complies
Residual indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies
Swelling	ISO 24336	$\leq 18$ %	Complies
Dimensional stability due to variation of temperature	EN ISO 23999	$\leq 0,25$ %	Complies
Effect of furniture leg	EN 424	-	No Visible Damage

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Cfl-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

## Additional properties

Impact sound reduction	EN ISO 10140	dB ( $\Delta L_w$ )	18
Walking noise	EN16205:2020	dB	Reduction improvement - 15
Thermal resistance (Thermal conductivity)	EN 12667 / ISO 1957	(m <sup>2</sup> K)/W	R $\leq 0,150$

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK INLAY
- 4 PVC FREE CORK RIGID CORE
- 5 INTEGRATED CORK UNDERLAY



# wood Inspire

Technical Data Sheet	Standard	Unit / Requirement	Value
Dimension (LxWxT)	-	mm	1225x195x7,3
Mass per unit	-	Kgs / m <sup>2</sup>	7,23
Packaging (box / pallet)	-	m <sup>2</sup>	1,862 / 81,928
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

## General properties - EN 16511

Thickness, t -	ISO 24337	$\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm	Complies
Length, l	ISO 24337	$\leq 1500$ mm: $\Delta l \leq 0,5$ mm / $> 1500$ mm: $\Delta l \leq 0,3$ mm/m	Complies
Width, w	ISO 24337	$\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm	Complies
Squareness, q	ISO 24337	$max \leq 0,20$ mm	Complies
Straightness, s	ISO 24337	$max \leq 0,30$ mm/m	Complies
Openings, o	ISO 24337	$max \leq 0,20$ mm	Complies
Height difference, h	ISO 24337	$h_{max} \leq 0,15$ mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies

## Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	$\geq 5000$ cycles	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	$\geq 1600$ mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	Groups 1 and 2: grade 5 Group 3: grade 4	Complies
Residual indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies
Swelling	ISO 24336	$\leq 18$ %	Complies
Dimensional stability due to variation of temperature	EN ISO 23999	$\leq 0,25$ %	Complies
Effect of furniture leg	EN 424	-	No Visible Damage

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Dfl-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

## Additional properties

Impact sound reduction	EN ISO 10140	dB ( $\Delta L_w$ )	15
Walking noise	IHD-W431	"dB %"	Reduction improvement 12,2 dB Difference of loudness 54%
Thermal conductivity	EN 12667	W/(mK)	0,111
Thermal resistance	EN 12667 / ISO 1957	(m <sup>2</sup> K)/W	0,04

1 NON PVC PROTECTIVE WEAR LAYER

2 NON PVC WOOD PRINTED FILM

3 CORK INLAY

4 NON PVC CORK RIGID CORE

5 INTEGRATED CORK UNDERLAY



# wood Hydro Natural

Technical Data Sheet	Standard	Unit	Value	Value XL
Dimension (LxWxT)	-	mm	1225x195x5.5mm	1525x195x7.0mm
Mass per unit	-	Kgs / m <sup>2</sup>	7.5	9.5
Packaging (box / pallet)	-	M <sup>2</sup>	2,15 / 94,59	1,784 / 78,51
Level of use Domestic	ISO 10874	Class	23	23
Level of use Commercial	ISO 10874	Class	33	33

## General properties - EN 16511

Thickness, t -	ISO 24337	" $\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm"	Complies	Complies
Length, l	ISO 24337	" $\leq 1500$ mm: $\Delta l \leq 0,5$ mm / $> 1500$ mm: $\Delta l \leq 0,3$ mm/m"	Complies	Complies
Width, w	ISO 24337	" $\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm"	Complies	Complies
Squareness, q	ISO 24337	$max \leq 0,20$ mm	Complies	Complies
Straightness, s	ISO 24337	$max \leq 0,30$ mm/m	Complies	Complies
Openings, o	ISO 24337	$max \leq 0,20$ mm	Complies	Complies
Height difference, h	ISO 24337	$h_{max} \leq 0,15$ mm	Complies	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies	Complies

## Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	$\geq 5000$ cycles	Complies	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	$\geq 1600$ mm	Complies	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies	Complies
Resistance to staining	EN 438-2	"Groups 1 and 2: grade 5 Group 3: grade 4"	Complies	Complies
Residual indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies	Complies
Swelling	ISO 24336	$\leq 18$ %	Complies	Complies
Dimensional stability due to variation of temperature	EN ISO 23999	$\leq 0,25$ %	Complies	Complies
Effect of furniture leg	EN 424	-	No Visible Damage	No Visible Damage

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Cfl-S1	Cfl-S1
Slip Classification	EN 13893	Class	DS	DS
Formaldehyde emission	EN 717-1	Class	E1	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable	Undetectable

## Additional properties

Impact sound reduction	EN ISO 10140	dB ( $\Delta L_w$ )	7 - without underlay 17 - with underlay *	9 - without underlay 17 - with underlay *
Walking noise	EN16205:2020	dB	Reduction improvement - 10	Reduction improvement - 10
Thermal resistance ( Thermal conductivity )	EN 12667 / ISO 1957	(m <sup>2</sup> K)/W	R $\leq$ 0,150	R $\leq$ 0,150

1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER

2 DIGITAL PRINTING IMAGE ON CORK

3 CORK COMPOSITE CORE



# wood Natural

Technical Data Sheet	Standard	Unit / Requirement	Value	Value XL
Dimension (LxWxT)	-	-	1220x185x9.0mm	1830x185x10,0mm
Mass per unit	-	Kgs / m <sup>2</sup>	7,1	8
Packaging (box / pallet)	-	M2	1,806 / 79,446	2,032 / 89,408
Level of use Domestic	ISO 10874	Class	23	23
Level of use Commercial	ISO 10874	Class	33	33

## General properties - EN 16511

Thickness, t -	ISO 24337	" $\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm"	Complies	Complies
Length, l	ISO 24337	" $\leq 1500$ mm: $\Delta l \leq 0,5$ mm / $> 1500$ mm: $\Delta l \leq 0,3$ mm/m"	Complies	Complies
Width, w	ISO 24337	" $\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm"	Complies	Complies
Squareness, q	ISO 24337	$max \leq 0,20$ mm	Complies	Complies
Straightness, s	ISO 24337	$max \leq 0,30$ mm/m	Complies	Complies
Openings, o	ISO 24337	$max \leq 0,20$ mm	Complies	Complies
Height difference, h	ISO 24337	$h_{max} \leq 0,15$ mm	Complies	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies	Complies

## Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	$\geq 5$ 000 cycles	Complies	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	$\geq 1600$ mm	Complies	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies	Complies
Resistance to staining	EN 438-2	"Groups 1 and 2: grade 5 Group 3: grade 4"	Complies	Complies
Residual indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies	Complies
Swelling	ISO 24336	$\leq 18$ %	Complies	Complies
Dimensional stability due to variation of temperature	EN ISO 23999	$\leq 0,25$ %	Complies	Complies
Effect of furniture leg	EN 424	-	No Visible Damage	No Visible Damage

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	C fl-s1	C fl-s1
Slip Classification	EN 13893	Class	DS	DS
Formaldehyde emission	EN 717-1	Class	E1	E1
Content pentachlorophenol (PCP)	"EN 14041 Annex B"	mg/kg	Undetectable	Undetectable

## Additional properties

Impact sound reduction	EN ISO 10140	dB ( $\Delta L_w$ )	12	14
Walking noise	EN 16205:2020	dB	Reduction improvement -10	Reduction improvement -12
Thermal conductivity	EN 12667 / ISO 1957	(m <sup>2</sup> K)/W	R $\leq 0,150$	R $\leq 0,150$

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK INLAY
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY



# wood Resist Eco

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	-	1220x185x10,5mm
Mass per unit	-	Kgs / m <sup>2</sup>	8,37
Packaging (box / pallet)	-	m <sup>2</sup>	1,806 / 72,240
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

## General properties - EN 16511

Thickness, t -	ISO 24337	$\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm	Complies
Length, l	ISO 24337	$\leq 1500$ mm: $\Delta l \leq 0,5$ mm / $> 1500$ mm: $\Delta l \leq 0,3$ mm/m	Complies
Width, w	ISO 24337	$\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm	Complies
Squareness, q	ISO 24337	$max \leq 0,20$ mm	Complies
Straightness, s	ISO 24337	$max \leq 0,30$ mm/m	Complies
Openings, o	ISO 24337	$max \leq 0,20$ mm	Complies
Height difference, h	ISO 24337	$h_{max} \leq 0,15$ mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies

## Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	$\geq 5$ 000 cycles	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	$\geq 1600$ mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	Groups 1 and 2: grade 5 Group 3: grade 4	Complies
Residual indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies
Swelling	ISO 24336	$\leq 18$ %	Complies

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Dfl-s1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	"EN 14041 Annex B"	mg/kg	Undetectable
Thermal resistance (Thermal conductivity)	EN ISO 10456	m <sup>2</sup> K/W	0,112

## Additional properties

Impact sound reduction	EN ISO 10140	dB ( $\Delta L_w$ )	15
Walking noise	IHD-W431	dB %	Difference of loudness 12,2dB Reduction improvement 40%

- 1 PVC-FREE PROTECTIVE WEAR LAYER
- 2 HIGH RESOLUTION DECORATIVE FILM
- 3 AGGLOMERATED CORK
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY



# wood Start Green Design

Technical Data Sheet	Standard	Unit / Requirements	Value
Dimension (LxWxT)	-	mm	1220x185x8,5
Mass per unit	-	Kgs / m <sup>2</sup>	6,862
Packaging (box / pallet)	-	m <sup>2</sup>	2,257 / 99,308
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	32

## General properties - EN 12104 - EN 20326

Thickness, t -	EN ISO 24346	± 0,25	Complies
Length, l	EN ISO 24342	+/- 0.5%	Complies
Width, w	EN ISO 24342	+/- 0.10%	Complies
Squareness, q	EN ISO 24342	< 0,20 mm	Complies
Straightness, s	EN ISO 24342	max ≤ 0,30 mm/m	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies
Dimensional Stability	ISO 20326 (Annex C)	≤ 0,25 %	Complies

## Classification properties - EN 12104 - EN 20326

Wear resistance IP	EN 14354 (Annex D)	≥ 5000 cycles	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,3 mm	Complies
Swelling	ISO 24336	≤ 18%	Complies
Locking system	ISO 24334	Long side ≥ 1 KN/m Short side ≥ 2 KN/m	Complies

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Of-s1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12667 / ISO 1957	mg/kg	Undetectable

## Additional properties

Walking noise	IHD-W431	dB %	Reduction improvement 12.7 dB Difference of loudness 56.0 %
Thermal resistance (Thermal conductivity)	EN ISO 10456	m <sup>2</sup> ·K/W	R ≤ 0,150

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH RANDOM EMBOSING
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK INLAY
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY



# wood Start Resist Eco

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	-	1220x185x10,5mm
Mass per unit	-	Kgs / m <sup>2</sup>	8,37
Packaging (box / pallet)	-	m <sup>2</sup>	2,483 / 99,32
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	32

## General properties - EN 16511

Thickness, t -	ISO 24337	Δtavg ≤ 0,50 mm, relative to nominal value / tmax - tmin ≤ 0,50 mm	Complies
Length, l	ISO 24337	≤ 1500 mm: Δl ≤ 0,5 mm / > 1500 mm: Δl ≤ 0,3 mm/m	Complies
Width, w	ISO 24337	Δwavg ≤ 0,10 mm, relative to nominal value / wmax - wmin ≤ 0,20 mm	Complies
Squareness, q	ISO 24337	max ≤ 0,20 mm	Complies
Straightness, s	ISO 24337	max ≤ 0,30 mm/m	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies

## Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	≥ 5 000 cycles	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	≥ 1600 mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	Groups 1 and 2: grade 5 Group 3: grade 4	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,2 mm	Complies
Swelling	ISO 24336	≤ 18%	Complies

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	E
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	"EN 14041 Annex B"	mg/kg	Undetectable
Thermal resistance (Thermal conductivity)	EN ISO 10456	m <sup>2</sup> ·K/W	0,065

## Additional properties

Sound Pressure Level	EN ISO 10140	dB (ΔLw)	5,8
Walking noise	IHD-W431	dB %	Difference of loudness 10,4dB Reduction improvement 40%

- 1 PVC-FREE PROTECTIVE WEAR LAYER
- 2 HIGH RESOLUTION DECORATIVE FILM
- 3 NATURAL FIBER CORE
- 4 INTEGRATED CORK UNDERLAY



Technical Data Sheet	Standard	Unit / Requirement	Value
Dimension (LxWxT)	-	mm	1230x200x4
Mass per unit	-	Kgs / m <sup>2</sup>	4,19
Packaging (box / pallet)	-	m <sup>2</sup>	2,46 / 108,24
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

#### General properties - EN 16511

Thickness, t -	ISO 24346	nominal value + 0,13 / - 0,10	Complies
Length, l	ISO 24342	≤ 0,15 %	Complies
Width, w	ISO 24337	≤ 0,10%/m	Complies
Squareness, q	ISO 24337	≤ 0,25 mm	Complies
Straightness, s	ISO 24337	≤ 0,25 mm	Complies
Residual indentation	EN ISO 24343-1	≤ 0,1 mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Dimensional stability due to variation of temperature	EN ISO 23999	≤ 0,25 %	Complies
Curling	EN ISO 23999:2018	≤ 2mm	Complies
Light Fastness	ISO 105-B02:2014	Blue Scale > 6	Complies

#### Wear and Performance requirements

Abrasion resistance	EN 13329:2006+A1:2008 Annex E (Sandpaper-Method)	≥ 5 000 cycles	Complies
Micro-scratch	EN 16094	≤ MSR-A2	Complies
Furniture leg	EN 424	no visible change / damages	Complies
Resistance to staining	EN 438-2:2019	Groups 1 and 2: grade 5 Group 3: grade 4	Complies

#### Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Cfl-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	CEN/TR 14823:2004	mg/kg	Complies
Electrostatic Behaviour	EN 1815:2016	kV	Not Antistatic

#### Additional properties

Swelling	ISO 24336	≤ 12 %	60 (*)
Impact sound reduction	EN ISO 10140	dB (Δ Lw)	65 (*)
Walking noise	IHD-W431	dB%	Reduction improvement 12,6 dB Difference of loudness 57%
Thermal conductivity	EN 12667	(m <sup>2</sup> K)/W	0,02

Technical Data Sheet	Standard	Unit / Requirement	Value
Dimension (LxWxT)	-	mm	910x300x9.5mm
Mass per unit	-	Kgs / m <sup>2</sup>	9.2
Packaging (box / pallet)	-	M2	1,638 / 59,968
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

#### General properties - EN 16511

Thickness, t -	ISO 24337	Δtavg ≤ 0,50 mm, relative to nominal value / tmax - tmin ≤ 0,50 mm"	Complies
Length, l	ISO 24337	"≤ 1500 mm: Δl ≤ 0,5 mm / > 1500 mm: Δl ≤ 0,3 mm/m"	Complies
Width, w	ISO 24337	Δwavg ≤ 0,10 mm, relative to nominal value / wmax - wmin ≤ 0,20 mm"	Complies
Squareness, q	ISO 24337	max ≤ 0,20 mm	Complies
Straightness, s	ISO 24337	max ≤ 0,30 mm/m	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies

#### Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	≥ 5 000 cycles	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	≥ 1600 mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	"Groups 1 and 2: grade 5 Group 3: grade 4"	Complies
Residual indentation	EN ISO 24343-1	≤ 0,2 mm	Complies
Swelling	ISO 24336	≤ 18 %	Complies
Dimensional stability due to variation of temperature	EN ISO 23999	≤ 0,25 %	Complies
Effect of furniture leg	EN 424	-	No Visible Damage

#### Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Cfl-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

#### Additional properties

Impact sound reduction	EN ISO 10140	dB (Δ Lw)	18
Walking noise	EN16205:2020	dB	Reduction improvement - 15
Thermal resistance ( Thermal conductivity )	EN 12667 / ISO 1957	(m2K)/W	R≤ 0,150

1 SRT NON PVC PROTECTIVE WEAR LAYER

2 HIGH RESOLUTION DECORATIVE FILM

3 NON PVC CORK RIGID CORE

4 INTEGRATED CORK UNDERLAY



1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER

2 DIGITAL PRINTING IMAGE ON CORK

3 CORK INLAY

4 CORK BIO CORE

5 INTEGRATED CORK UNDERLAY



# stone Hydro Natural

Technical Data Sheet	Standard	Unit / Requirement	Value
Dimension (LxWxT)	-	mm	910x300x7,0mm
Mass per unit	-	Kgs / m <sup>2</sup>	9,4
Packaging (box / pallet)	-	M2	1,638 / 58,968
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

## General properties - EN 16511

Thickness, t -	ISO 24337	Δtavg ≤ 0,50 mm, relative to nominal value / tmax - tmin ≤ 0,50 mm"	Complies
Length, l	ISO 24337	"≤ 1500 mm: Δl ≤ 0,5 mm / > 1500 mm: Δl ≤ 0,3 mm/m"	Complies
Width, w	ISO 24337	Δwavg ≤ 0,10 mm, relative to nominal value / wmax - wmin ≤ 0,20 mm"	Complies
Squareness, q	ISO 24337	max ≤ 0,20 mm	Complies
Straightness, s	ISO 24337	max ≤ 0,30 mm/m	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies

## Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	≥ 5 000 cycles	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	≥ 1600 mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	"Groups 1 and 2: grade 5 Group 3: grade 4"	Complies
Residual indentation	EN ISO 24343-1	≤ 0,2 mm	Complies
Swelling	ISO 24336	≤ 18 %	Complies
Dimensional stability due to variation of temperature	EN ISO 23999	≤ 0,25 %	Complies
Effect of furniture leg	EN 424	-	No Visible Damage

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Cfl-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

## Additional properties

Impact sound reduction	EN ISO 10140	dB (ΔLw)	9 - without underlay 17 - with underlay *
Walking noise	EN 16205: 2020	dB	Reduction improvement - 10
Thermal resistance ( Thermal conductivity )	EN 12667 / ISO 1957	(m2K)/W	R ≤ 0,150

\* underlay GO4CORK Unique

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 CORK COMPOSITE CORE



# stone Inspire

Technical Data Sheet	Standard	Unit / Requirement	Value
Dimension (LxWxT)	-	mm	910x300x7
Mass per unit	-	Kgs / m <sup>2</sup>	6,21
Packaging (box / pallet)	-	m <sup>2</sup>	2,184 / 78,624
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

## General properties - EN 16511

Thickness, t -	ISO 24337	Δtavg ≤ 0,50 mm, relative to nominal value / tmax - tmin ≤ 0,50 mm	Complies
Length, l	ISO 24337	≤ 1500 mm: Δl ≤ 0,5 mm / > 1500 mm: Δl ≤ 0,3 mm/m	Complies
Width, w	ISO 24337	Δwavg ≤ 0,10 mm, relative to nominal value / wmax - wmin ≤ 0,20 mm	Complies
Squareness, q	ISO 24337	max ≤ 0,20 mm	Complies
Straightness, s	ISO 24337	max ≤ 0,30 mm/m	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies

## Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	≥ 5 000 cycles	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	≥ 1600 mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	Groups 1 and 2: grade 5 Group 3: grade 4	Complies
Residual indentation	EN ISO 24343-1	≤ 0,2 mm	Complies
Swelling	ISO 24336	%	< 2%
Dimensional stability due to variation of temperature	EN ISO 23999	≤ 0,25 %	Complies
Effect of furniture leg	EN 424	-	No Visible Damage

## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Cfl-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

## Additional properties

Impact sound reduction	EN ISO 10140	dB (ΔLw)	18
Walking noise	IHD-W431	dB %	Reduction improvement 18,5 dB Difference of loudness 65%
Thermal conductivity	EN 12667	W/(mK)	0,111
Thermal resistance	EN 12667 / ISO 1957	(m2K)/W	0,06

- 1 HRT NON PROTECTIVE WEAR LAYER
- 2 NON PVC STONE PRINTED FILM
- 3 CORK INLAY
- 4 NON PVC CORK RIGID CORE
- 5 INTEGRATED CORK UNDERLAY



# stone Pure

Technical Data Sheet	Standard	Unit / Requirement	Value
Dimension (LxWxT)	-	mm	900x600x8
Mass per unit	-	Kgs / m <sup>2</sup>	4,48
Packaging (box / pallet)	-	m <sup>2</sup>	3,78 / 136,08
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

## GENERAL PROPERTIES - EN 12104

Side length Squareness and Straightness of edges for side length ≤ 400 mm / > 400 mm	EN ISO 24342	deviation from nominal: ≤ 0,2 % up to 1,0 mm maximum deviation allowed: ≤ 0,5 / ≤ 1,0°	Complies
Overall thickness mm	EN ISO 24346	≥ 4,0	Complies
Apparent density average - individual results	EN ISO 23997	≥ 500 kg/m <sup>3</sup>	Complies
Wear resistance IP	EN 14354 (Annex D)	≥ 7 500 cycles	Complies
Dimensional stability %	EN ISO 23999	≤ 0,25	Complies
Curling mm	EN ISO 23999	≤ 2	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,2	Complies
Simulated movement of a furniture leg	EN 424	No damage shall be visible after testing with type 2 foot	No visible damage


## SAFETY PROPERTIES - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Cfl-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

## ADDITIONAL PROPERTIES

Impact sound reduction	EN ISO 10140	dB (Δ Lw)	13
Walking noise	IHD-W431	dB %	21,9 70
Thermal resistance (Thermal conductivity)	EN ISO 10456	m <sup>2</sup> ·K/W	0,102

- 1 HIGH QUALITY PROTECTIVE VARNISH WITH EMBOSSED IN REGISTER
- 2 DIGITAL PRINTING IMAGE ON CORK
- 3 AGGLOMERATED CORK

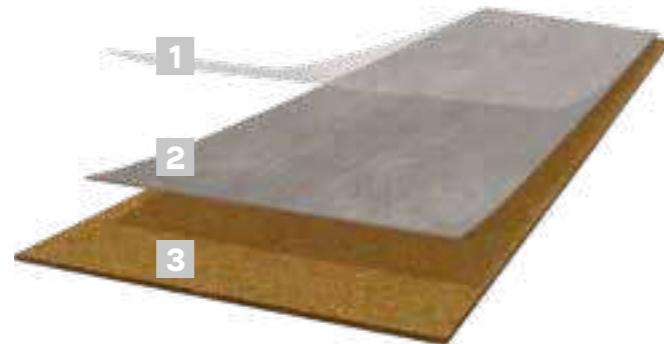

# stone Essence

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	-	905x295x10,5mm
Mass per unit	-	Kgs / m <sup>2</sup>	7,11
Packaging (box / pallet)	-	m <sup>2</sup>	2,136 / 76,896
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

## General properties - EN 12104 - EN 20326

Thickness, t -	EN ISO 24346	± 0,25	Complies
Length, l	EN ISO 24342	+/- 0.5%	Complies
Width, w	EN ISO 24342	+/- 0.10%	Complies
Squareness, q	EN ISO 24342	< 0.2	Complies
Straightness, s	EN ISO 24342	≤ 0,30	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies
Dimensional Stability	ISO 20326 (Anex C)	≤ 0.25 %	Complies

## Classification properties - EN 12104 - EN 20326

Wear resistance IP	EN 14354 (Annex D)	≥ 5 0000 cycles	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,3 mm	Complies
Swelling	ISO 24336	≤ 18%	Complies
Locking system	ISO 24334	Long side ≥ 1 KN/m Short side ≥ 2 KN/m	Complies


## Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Cfl-s1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/kg	Undetectable

## Additional properties

Impact sound reduction	EN ISO 10140	dB (Δ Lw)	16
Walking noise	IHD-W431	dB %	13,2 51,6
Thermal resistance (Thermal conductivity)	EN ISO 10456	m <sup>2</sup> ·K/W	R ≤ 0,150

- 1 PROTECTIVE WEAR LAYER
- 2 HIGH RESOLUTION IMAGE
- 3 CORK COMPOSITE CORE
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY

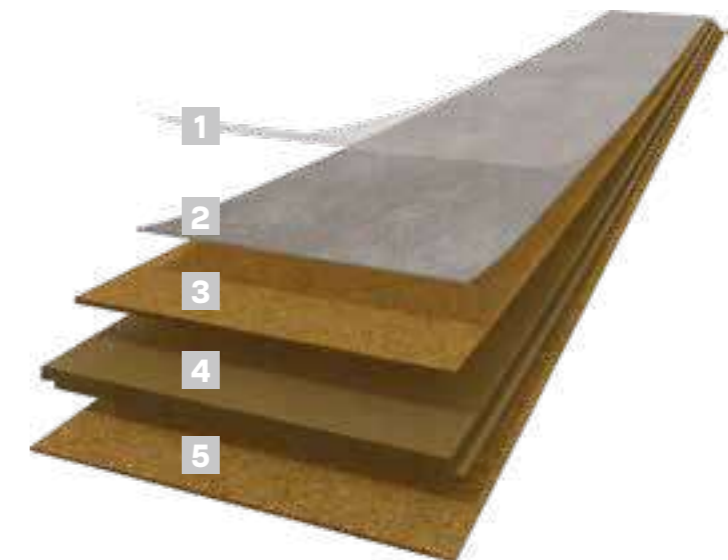

# stone Natural

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	-	905x295x9,0mm
Mass per unit	-	Kgs / m <sup>2</sup>	7,1
Packaging (box / pallet)	-	m <sup>2</sup>	2,136 / 76,89
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

#### General properties - EN 16511

Thickness, t -	ISO 24337	" $\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm"	Complies
Length, l	ISO 24337	" $\leq 1500$ mm: $\Delta l \leq 0,5$ mm / $> 1500$ mm: $\Delta l \leq 0,3$ mm/m"	Complies
Width, w	ISO 24337	" $\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm"	Complies
Squareness, q	ISO 24337	max $\leq 0,20$ mm	Complies
Straightness, s	ISO 24337	max $\leq 0,30$ mm/m	Complies
Openings, o	ISO 24337	max $\leq 0,20$ mm	Complies
Height difference, h	ISO 24337	hmax $\leq 0,15$ mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies

#### Classification properties - EN 16511

Wear resistance IP	EN 15468, procedure B	$\geq 5000$ cycles	Complies
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	$\geq 1600$ mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	"Groups 1 and 2: grade 5 Group 3: grade 4"	Complies
Residual indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies
Swelling	ISO 24336	$\leq 18$ %	Complies
Dimensional stability due to variation of temperature	EN ISO 23999	$\leq 0,25$ %	Complies
Effect of furniture leg	EN 424	-	No Visible Damage

#### Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	C fl-s1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	"EN 14041 Annex B"	mg/kg	Undetectable

#### Additional properties

Impact sound reduction	EN ISO 10140	dB ( $\Delta L_w$ )	12
Walking noise	EN 16205:2020	dB	Reduction improvement - 10
Thermal resistance ( Thermal conductivity )	EN 12667 / ISO 1957	(m <sup>2</sup> K)/W	R $\leq 0,150$

- 1 PROTECTIVE WEAR LAYER
- 2 HIGH RESOLUTION IMAGE
- 3 CORK COMPOSITE CORE
- 4 NATURAL FIBER CORE
- 5 INTEGRATED CORK UNDERLAY



# TERRAZZO

Capsule Collection

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	mm	900x600x8,0mm
Mass per unit	-	Kgs/m <sup>2</sup>	3,305
Packaging (box / pallet)	-	M2	3,78 / 136,08
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

#### General properties - EN 12104

"Side length Squareness and Straightness of edges for side length $\leq 400$ mm / $> 400$ mm"	ISO 24337	"deviation from nominal: $\leq 0,2$ % up to 1,0 mm maximum deviation allowed: $\leq 0,5$ / $\leq 1,0$ "	Complies
Overall thickness mm	ISO 24337	$\geq 6,0$	Complies
"Apparent density average - individual results"	ISO 24337	$\geq 500$ kg/m <sup>3</sup>	Complies
Wear resistance IP	ISO 24337	$\geq 7500$ cycles	Complies
Dimensional stability %	ISO 24337	$\leq 0,25$	Complies
Curling mm	ISO 24337	$\leq 2$	Complies
Residual indentation	ISO 24337	$\leq 0,2$	Complies
Simulated movement of a furniture leg	ISO 24337	No damage shall be visible after testing with type 2 foot	No visible damage

#### Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Cfl-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

#### Additional properties

Impact sound reduction	EN ISO 10140	dB ( $\Delta L_w$ )	Tests on going
Walking noise	IHD-W431	dB %	Tests on going
Thermal resistance (Thermal conductivity)	EN ISO 10456	m <sup>2</sup> K/W	Tests on going

- 1 HRT NON PVC PROTECTIVE SURFACE
- 2 PAINTED CORK VENEER
- 3 AGGLOMERATED CORK





# dekwall

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	EN 427	mm	600 ± 0.5% 300 ± 0.5%
Mass per unit	-	Kg/m <sup>2</sup>	0,95
Packaging (box / pallet)	-	m <sup>2</sup>	5,94 / 213,84
SQUARENESS	EN 427	mm	600: < 1.0mm 300: < 0.5mm
THICKNESS	ISO 7322	mm	3.0 ± 0.3%
APPARENT DENSITY	EN 672	Kg/m <sup>3</sup>	≥ 200
DIMENSION STABILIT	EN 434	%	3.0 ± 0.3%
CURLING	EN 434	mm	≤ 6
MOISTURE CONTENT	EN 12105	%	≤ 7
FORMALDEHYDE	EN 12149, method C	mg/Kg	≤ 95
VINYL CHLORIDE MONOMER (VCM)	EN 12149, TEST B	mg/Kg	≤ 0,2
THERMAL RESISTANCE	EN 12667	m <sup>2</sup> K/w	0.0572 (Varnished) 0.0583 (Waxed)
REACTION TO FIRE	EN 15102:2007	Class	E
SOUND ABSORPTION	ISO 354	α <sub>w</sub>	0,1
RELEASE OF HEAVY METALS AND SPECIFIC ELEMENTS	EN 12149		fulfilled

# Burel Cork Wall

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	EN 427	mm	600 ± 0.5% 300 ± 0.5%
Mass per unit	-	Kg/m <sup>2</sup>	0,95
Packaging (box / pallet)	-	m <sup>2</sup>	5,94 / 213,84
SQUARENESS	EN 427	mm	600: < 1.0mm 300: < 0.5mm
THICKNESS	ISO 7322	mm	3.0 ± 0.3%
APPARENT DENSITY	EN 672	Kg/m <sup>3</sup>	≥ 200
DIMENSION STABILIT	EN 434	%	3.0 ± 0.3%
CURLING	EN 434	mm	≤ 6
MOISTURE CONTENT	EN 12105	%	≤ 7
FORMALDEHYDE	EN 12149, method C	mg/Kg	≤ 95
VINYL CHLORIDE MONOMER (VCM)	EN 12149, TEST B	mg/Kg	≤ 0,2
THERMAL RESISTANCE	EN 12667	m <sup>2</sup> K/w	0.0572 (Varnished) 0.0583 (Waxed)
REACTION TO FIRE	EN 15102:2007	Class	E
SOUND ABSORPTION	ISO 354	α <sub>w</sub>	0,1
RELEASE OF HEAVY METALS AND SPECIFIC ELEMENTS	EN 12149		fulfilled

- 1 PROTECTIVE FINISH
- 2 GENUINE CORK VENEER
- 3 CORK AGGLOMERATED CORE



- 1 PROTECTIVE FINISH
- 2 CORK AND BUREL AGGLOMERATED CORE
- 3 CORK AGGLOMERATE CORE





**Amorim Cork Flooring, S.A.**

Rua do Ribeirinho 202 - P.O. Box 13

4536-907 S. Paio de Oleiros - Portugal

T. +351 22 747 56 00 E. info.acf@amorim.com



[www.wicanders.com](http://www.wicanders.com)

<b>DE</b>	Amorim Deutschland GmbH	(+49) 4221 5 93-01	info.acf.de@amorim.com
<b>BENE LUX</b>	Amorim Benelux B.V.	(+31) 166 604 111	info.acf.bnl@amorim.com
<b>AT</b>	Amorim Deutschland GmbH	(+43) 154 51 65 10	info.acf.at@amorim.com
<b>CH</b>	Amorim Flooring Switzerland AG	(+41) 41 726 20 20	info.acf.ch@amorim.com
<b>PT</b>	Amorim Cork Flooring, S.A.	(+351) 227 475 600	info.acf@amorim.com
<b>ES</b>	Amorim Cork Flooring, S.A.	(+351) 227 475 600	info.acf.es@amorim.com
<b>FR</b>	Amorim Cork Flooring, S.A.	(+33) 800 914 848	info.acf.fr@amorim.com
<b>DK</b>	Timberman Denmark A/S	(+45) 995 252 52	timberman@timberman.dk
<b>PL</b>	Dom Korkowy, Sp. z o.o.	(+48) 126 379 639	krakow@domkorkowy.pl
<b>US</b>	Amorim Flooring North America	(+1) 410 553 60 62	info.acf.us@amorim.com
<b>RU</b>	Amorim Flooring Rus, OOO	(+7) 495 280 7860	info.acf.ru@amorim.com
<b>IT</b>	Amorim Cork Flooring, S.A.	(+39) 068 635 7287	info.acf.it@amorim.com
<b>FI</b>	Korkkitrio Oy	(+358) 50 554 2616	wicanders.kkt@amorim.com
<b>SW</b>	Amorim Flooring Sweden	(+46) 311 077 40	info.acf.se@amorim.com
<b>CA</b>	Amorim Flooring Canada	(+1) 548 457 2240	sales.afcan@amorim.com



**INVESTORS IN PEOPLE™**  
We invest in people Standard

Recognised by EFQM  
★★★ 2021

**AMORIM**